

QP Series Model QP-10

Parts Manual

Record of Change 201

This manual contains important safety information and must be carefully read in its entirety and understood prior to installation by all personnel who install, operate and/or maintain this product.

On-line product registration, parts ordering and warranty information is available at www.quincycompressor.com

Manual No. 2022201501

July 2014 Edition

TABLE OF CONTENTS

Serial Number Identification.....2
Ordering Replacement Parts2
Crankcase Lubricant Capacity2
Quin-Cip-D & Quin-Cip Lubricant2
Crankshaft Group.....3
Crankcase Group.....4
Sterling Blue Oil & Filters Kit4
Bearing Carrier Group.....5
Gasket Set.....5
Connecting Rod & Piston Groups6-7
Sterling Blue Ring Kit.....7
Cylinder & Head Groups8-9
Sterling Blue Valve Kit9
Control Piping Schematics.....10
Pilot Valves..... 11
Differential Setting Chart 11
Suction Valve Unloader Assemblies.....12
Decals12
Typical Unit Repair Parts List.....13-14

INTRODUCTION

This manual provides information for the Model QP-10 reciprocating compressor, per Record of Change 201.

The Model QP-10 is an aircooled, two stage, two cylinder, pressure lubricated compressor, with up to 175 PSI continuous pressure capability. It has a 5" low pressure bore and a 2.75" high pressure bore, with a 3.5" stroke. This compressor can be run at 550-1000 RPM.

Available options include:

-head unloaders

CHANGES

Since previous printing dated December 2011:

The bearing carrier was redesigned with a new oil pump including an oil filter.

SERIAL NUMBER IDENTIFICATION

The unit serial number identification tag is located on the air tank top plate. The basic compressor serial number decal is located on the side of the crankcase opposite the oil fill side. *Fill in the numbers from your compressor unit and basic compressor in the corresponding spaces provided here, and reference this page when ordering replacement parts.*

Unit Serial Number

Basic Serial Number

All replacement parts are to be ordered through an authorized Quincy distributor. Insist on genuine Quincy parts only! Failure to do so may void warranty.

ORDERING REPLACEMENT PARTS

Prompt service can be rendered on repair parts orders if the following information is given:

- Item 1)** the model number, record of change number, & serial number.
- Item 2)** the exact part number needed. (Do not order by item numbers.)
- Item 3)** the exact quantity needed.
- Item 4)** the preferred type of transportation.

CRANKCASE LUBRICANT CAPACITY

Model	Capacity
QP-10	2 qts. - 26 oz. (2.54 lit.)

QUIN-CIP LUBRICANT

Refer to the chart below to order Quin-Cip-D or Quin-Cip lubricant from your local authorized Quincy distributor.

Quin-Cip-D Lubricant (synthetic)	
SAE 30 (ISO 100)	
Quart	115468Q
Case (12 Qts.)	115468C
Quin-Cip Lubricant	
SAE 10W (ISO 32)	
Quart	112541Q032
Case (12 Qts.)	112541C032
SAE 20 (ISO 68)	
Quart	112542Q068
Case (12 Qts.)	112542C068
SAE 30 (ISO 100)	
Quart	112543Q100
Case (12 Qts.)	112543C100

CAUTION !

Refer to the QP Industrial / Air Master Series instruction manual for vital lubrication information.

CAUTION !

Follow all safety precautions outlined in the QP Industrial / Air Master Series instruction manual.


WARNING !

Do not operate this compressor without a totally enclosed belt guard or any other required safety equipment.

DANGER !


Air used for breathing or food processing must meet OSHA 1910.134 or FDA 21 CFR 178.3570 regulations. Failure to do so may cause severe injury or death.

CRANKSHAFT GROUP 116174-002

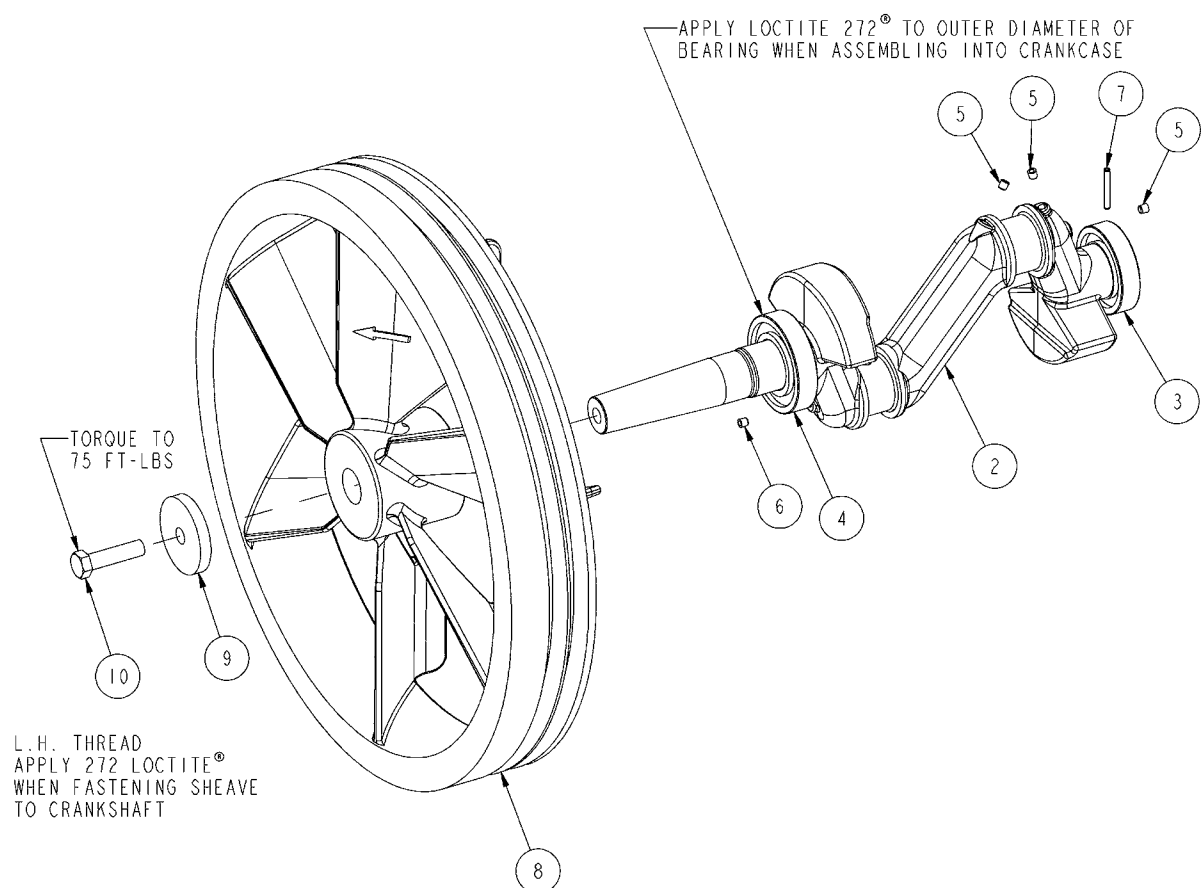

CRANKSHAFT GROUP 116174-002 BILL OF MATERIALS			
ITEM	PART NUMBER	QTY	DESCRIPTION
1	116184X002	1	GR, CRANKSHAFT (INCLUDES ITEM 2,3,4)
2	116184-002	1	CRANKSHAFT
3	111780	1	BALL BEARING
4	114571	1	BALL BEARING
5	6565	3	HOLE PLUG
6	6565-001	1	ORIFICE, .031
7	110705-F17	1	ROLL PIN, 3/16 X 1.38
8	111776-002	1	SHEAVE, 19.50 O.D., 2 GROOVE, B SECT. CCW
9	113077	1	WASHER
10	111128-N17	1	HEX SCREW, 1/2-20 UNF X 2.00, GRD 5, LH


CRANKCASE GROUP 2021090303

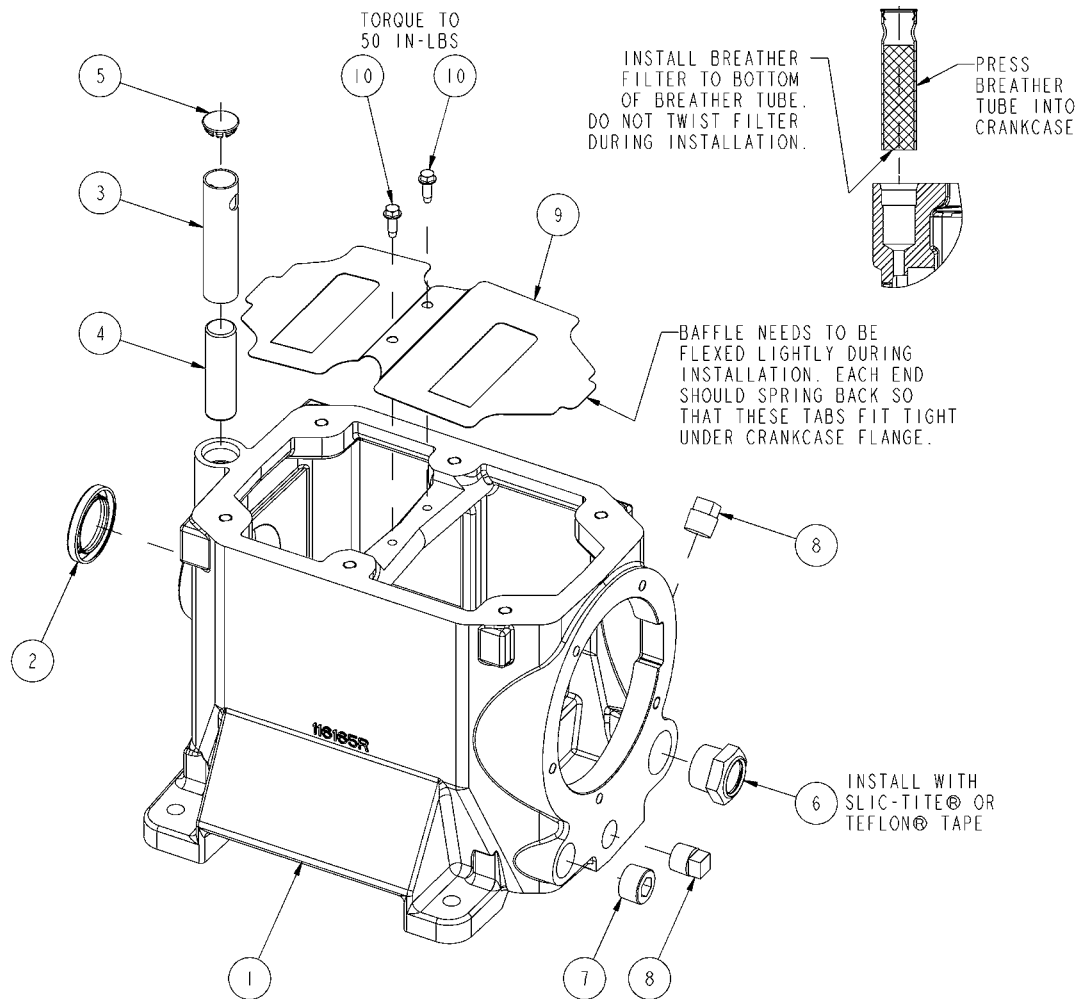

116175-002 CRANKCASE GROUP BILL OF MATERIALS			
ITEM	PART NUMBER	QTY	DESCRIPTION
1	116165	1	CRANKCASE
2	111781-001	1	OIL SEAL, VITON
3	113947	1	BREATHER TUBE
4	111333	1	FILTER
5	40825	1	HOLE PLUG
6	114177	1	OIL LEVEL SIGHT GUAGE, 1 NPT
7	2276	1	PIPE PLUG, 3/4 NPT
8	2057	2	PIPE PLUG
9	116179	1	CRANKCASE BAFFLE
10	110511-J10	2	TAPTITE SCREW, 1/4-20 UNC X .75

Sterling Blue Oil & Filters Kit 2022103501			
Item #	Qty.	Part Number	Description
1		110377E100	air filter element
1		2023400100	oil filter
3 qt.		115468Q	Quin-Cip-D synthetic lubricant

BEARING CARRIER GROUP 2024400460

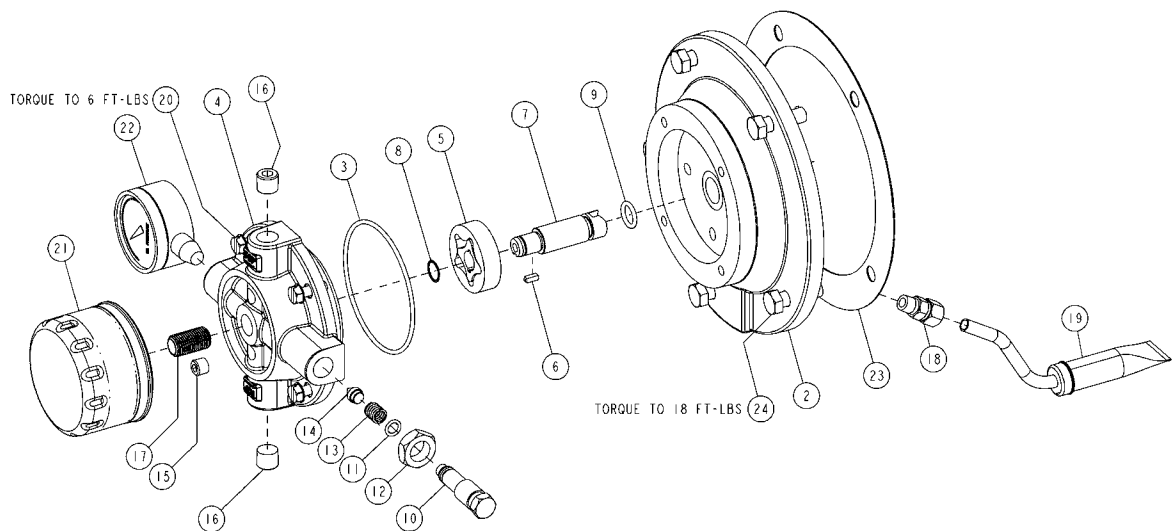

2024400460 BEARING CARRIER ASSEMBLY			
ITEM	PART NUMBER	QTY	DESCRIPTION
1	2024400450	1	BEARING CARRIER ASSEMBLY (N.S.S. - ORDER KIT)
2	2024400401	1	BEARING CARRIER
3	22749-152	1	O-RING, VITON
4	2024400601	1	OIL PUMP HOUSING
5	160003	1	OIL PUMP
6	160075-001	1	KEY
7	2024200202	1	OIL PUMP DRIVESHAFT
8	6285	1	RETAINING RING
9	22749-112	1	O-RING, VITON
10	5489	1	ADJUSTMENT SCREW
11	22749-011	1	O-RING, VITON
12	124369-P02	1	JAM NUT
13	1160	1	SPRING
14	112857	1	NEEDLE VALVE
15	2755S	1	PIPE PLUG, 1/8 NPT
16	2719	2	PIPE PLUG, 1/4 NPT
17	2023400200	1	FILTER STUD
18	2023200108	1	TUBE FITTING,CONNECTOR, 5/16 TUBE X 1/8 NPT
19	2023400004	1	OIL PICKUP TUBE WITH SCREEN
20	123777-J10	4	MACHINE SCREW
21	2023400100	1	OIL FILTER
22	110822	1	OIL PRESSURE GAUGE
23	114583	1	GASKET, CARRIER
24	115037-L14	5	SCREW, CAP HEX, SEALANT, GRADE 5
MAINTENANCE PARTS			
	2023400101	10	PACK OF OIL FILTERS
REPLACEMENT KITS			
	2024400480	1	BEARING CARRIER ASSEMBLY REPLACEMENT KIT INCLUDES BEARING CARRIER ASSEMBLY, FILTER, GAUGE, AND GASKET
* INSTALL WITH PIPE SEALANT			
** INSTALL WITH RETAINING COMPOUND			
*** INSTALL WITH PIPE SEALANT ON NPT & THREADLOCKER ON NUT			
N.S.S. = NOT SOLD SEPARATE			
TORQUE VALUES ARE FOR DRY THREADS. TIGHTEN MULTIPLE BOLTS, CAPSCREWS, AND HEX NUTS IN A CRISS-CROSS PATTERN. BRING EACH FASTENER TO THE RECOMMENDED TORQUE SPECIFICATION IN EVEN INCREMENTS.			

Gasket Set 114772			
Item #	Qty.	Part Number	Description
	1	111781-001	oil seal
	1	111274-002	gasket, head to valve plate
	1	114585	gasket, cylinder to valve plate
	1	114586	gasket, head to valve plate
	1	114599	gasket, cylinder to valve plate
	1	114583	gasket, crankcase to brg. carrier
	1	114584	gasket, cylinder to crankcase
	3	112708-908	"o"ring, silicone

CONNECTING ROD & PISTON GROUP 116176X002



(low pressure)

116176X002 GR, PISTON/ROD, LP BILL OF MATERIALS			
ITEM	PART NUMBER	QTY	DESCRIPTION
1	114662X003	1	CONNECTING ROD ASSEMBLY (N.S.S. ORDER 114662K003)
2	110146	1	PISTON PIN
3	114563	1	PISTON
4	8648	2	RETAINING RING
5	114607	2	OIL RING RAIL
6	114606	1	OIL RING SPACER
7	112018	2	NEEDLE BEARING
8	2025058802	1	PISTON RING, SCRAPER
9	112440-016	2	PISTON RING
MAINTENANCE PARTS			
	116176	1	PISTON RING SET, LP
	114563X	1	PISTON ASSEMBLY, LP INCLUDES PISTON, RING SET, PISTON PIN & PISTON PIN RETAINING RINGS
	110190-054	1	REPLACEMENT PISTON PIN ASSEMBLY, LP
	114662K003	1	CONNECTING ROD KIT INCLUDES CONNECTING ROD & BEARINGS

N.S.S. = NOT SOLD SEPARATE

RING GAPS TO BE STAGGERED WHEN ASSEMBLED.

PIP MARKS INDICATE TOP SURFACE OF RING.

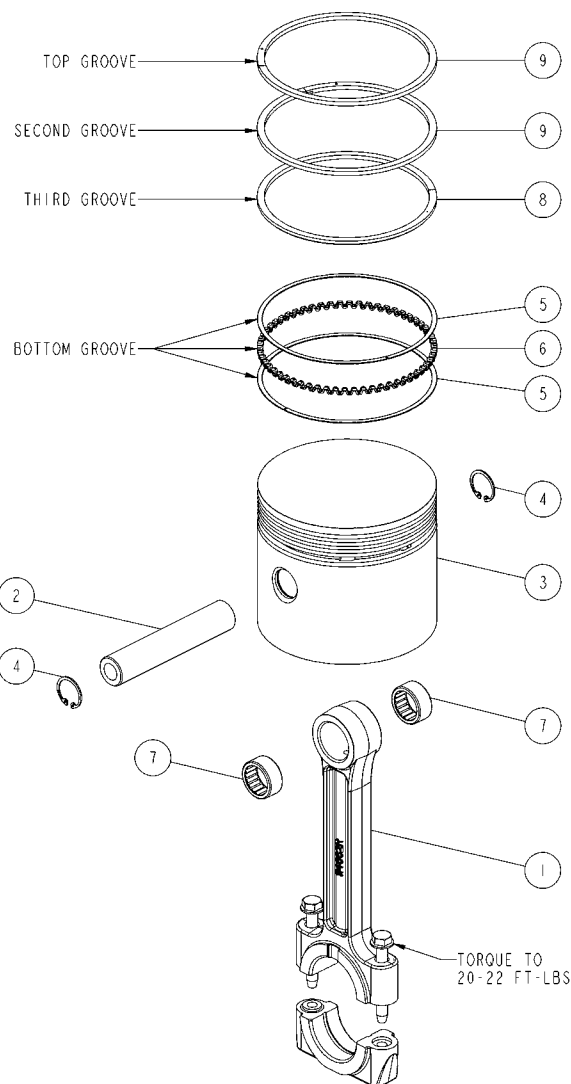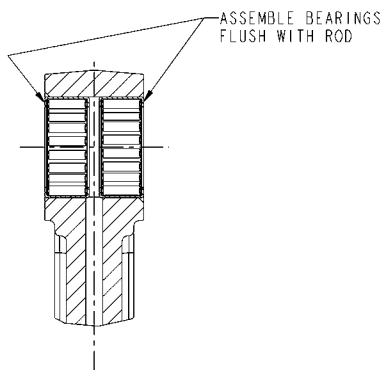

CONNECTING ROD & PISTON GROUP 116177X002



(high pressure)

116177X002 GR, PISTON/ROD,HP BILL OF MATERIALS			
ITEM	PART NUMBER	QTY	DESCRIPTION
1	114662X003	1	CONNECTING ROD ASSEMBLY (N.S.S. ORDER 114662K003)
2	110190-027	1	PISTON PIN
3	116159	1	PISTON
4	8648	2	RETAINING RING
5	112650	2	OIL RING RAIL
6	112651	1	OIL RING SPACER
7	112018	2	NEEDLE BEARING
8	2025058801	1	PISTON RING, SCRAPER
9	112440-017	2	PISTON RING
MAINTENANCE PARTS			
	116177	1	PISTON RING SET, HP
	116159X	1	PISTON ASSEMBLY, HP INCLUDES PISTON, RING SET, PISTON PIN & PISTON PIN RETAINING RINGS
	110190-055	1	REPLACEMENT PISTON PIN ASSEMBLY, HP
	114662K003	1	CONNECTING ROD KIT INCLUDES CONNECTING ROD & BEARINGS

N.S.S. = NOT SOLD SEPARATE

RING GAPS TO BE STAGGERED WHEN ASSEMBLED.

PIP MARKS INDICATE TOP SURFACE OF RING.

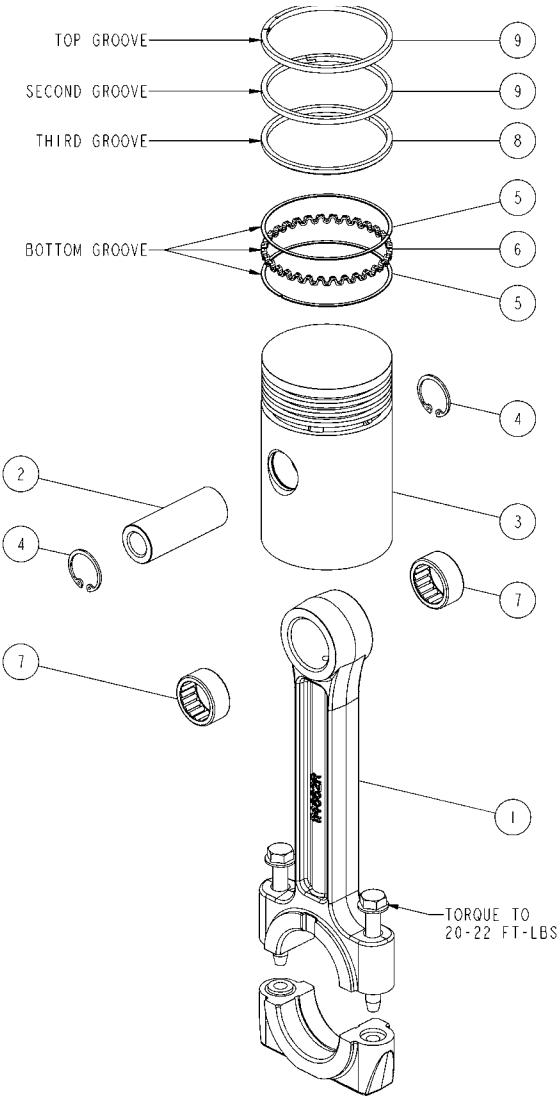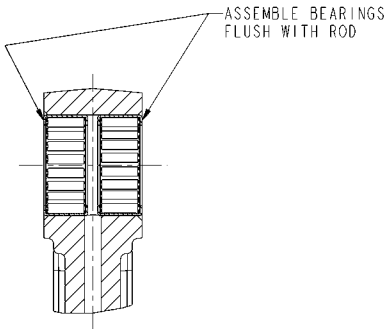


Sterling Blue Ring Kit 2022104600			
Item #	Qty.	Part Number	Description
1		114772	gasket set
1		116176	piston ring set
1		116177	piston ring set

CYLINDER & HEAD GROUP 116178

(without head unloaders)

ITEM	PART NUMBER	QTY	DESCRIPTION
1	116172	1	CYLINDER
2	114599	1	GASKET, CYLINDER/PLATE, HP
3	114585	1	GASKET, CYLINDER/PLATE, LP
4	116162X	1	VALVE PLATE ASSEMBLY, LP
5	116162-001	1	VALVE PLATE (IN S.S., ORDER V.P. ASSEMBLY)
6	112380	2	REED VALVE (IN S.S., ORDER V.P. ASSEMBLY)
7	112378-1	1	BUMPER (IN S.S., ORDER V.P. ASSEMBLY)
8	112728-J12	4	FLATHEAD SCR, 1/4-20UNC X 1.00, GR 8
9	112359-2	2	REED VALVE (IN S.S., ORDER V.P. ASSEMBLY)
10	112379	1	BUMPER (IN S.S., ORDER V.P. ASSEMBLY)
11	112378-3	1	BUMPER (IN S.S., ORDER V.P. ASSEMBLY)
12	112379-1	1	BUMPER (IN S.S., ORDER V.P. ASSEMBLY)
13	112373-J02	4	HEX NUT, 1/4-20 UNC
14	114688	1	VALVE PLATE STUD
15	116163X	1	VALVE PLATE ASSEMBLY, HP
16	116163-001	1	VALVE PLATE (IN S.S., ORDER V.P. ASSEMBLY)
17	112380-001	2	REED VALVE (IN S.S., ORDER V.P. ASSEMBLY)
18	114645-002	1	BUMPER (IN S.S., ORDER V.P. ASSEMBLY)
19	114645-003	1	BUMPER (IN S.S., ORDER V.P. ASSEMBLY)
20	112728-J12	2	FLATHEAD SCR, 1/4-20UNC X 1.00, GR 8
21	112373-J02	2	HEX NUT, 1/4-20 UNC
22	11274-002	1	GASKET, HEAD - VALVE PLATE
23	114586	1	GASKET, HEAD - VALVE PLATE
24	11115-6	1	HEAD, HIGH PRESSURE
25	114507	1	HEAD, LOW PRESSURE
26	114584	1	GASKET, CYLINDER - CRANKCASE
27	114595N038	8	FLAT WASHER, 3/8
28	110983Z126	8	HEX, SCREW, 3/8-16 UNC X 4.50, GRADE 8
29	112709-006	3	PLUG, 3/4-16 UNF W/O RING
30	123651-003	1	PIPE ELBOW, 90° STREET, 1/4 NPT x 1/4 NPT
31	2961-100	1	PRESSURE RELIEF VALVE
32	115037-L14	6	SCREW, CAP HEX, SEALANT, GRADE 5
33	114595N025	1	FLAT WASHER, 1/4
34	112373-J02	1	HEX NUT, 1/4-20 UNC
35	141650-026	1	BRASS NIPPLE, 1 NPT X 4.00
36	115101-006	1	PIPE ELBOW, 1 NPT
37	23358	2	TUBE FITTING, MALE CONN, 1" x 1 NPT
38	21730-B	1	PIPE ELBOW, 90° STREET, 1 NPT x 1 NPT
39	114508-001	1	INTERCOOLER
40	114574	3	INTERCOOLER CLAMP
41	110428W038	3	FLAT WASHER, 3/8
42	123478-L10	2	HEX SCREW, 3/8-16 UNC X .75, GRADE 5
43	114629-001	1	FLANGE SCREW, 5/16-18X0.75, GRADE 5
MAINTENANCE PARTS			
	114508K002	1	INTERCOOLER REPLACEMENT KIT: INCLUDES INTERCOOLER AND NUT/SLEEVE FITTING
	112708-908	3	O-RING, SILICONE (SEE ITEM 29)
	K0110H	1	HEAD KIT (INCLUDES ITEMS 4, 15 & AIR FILTER ELEMENT)
	110377S125	1	AIR FILTER / SILENCER
	110377E100	1	ELEMENT, AIR FILTER

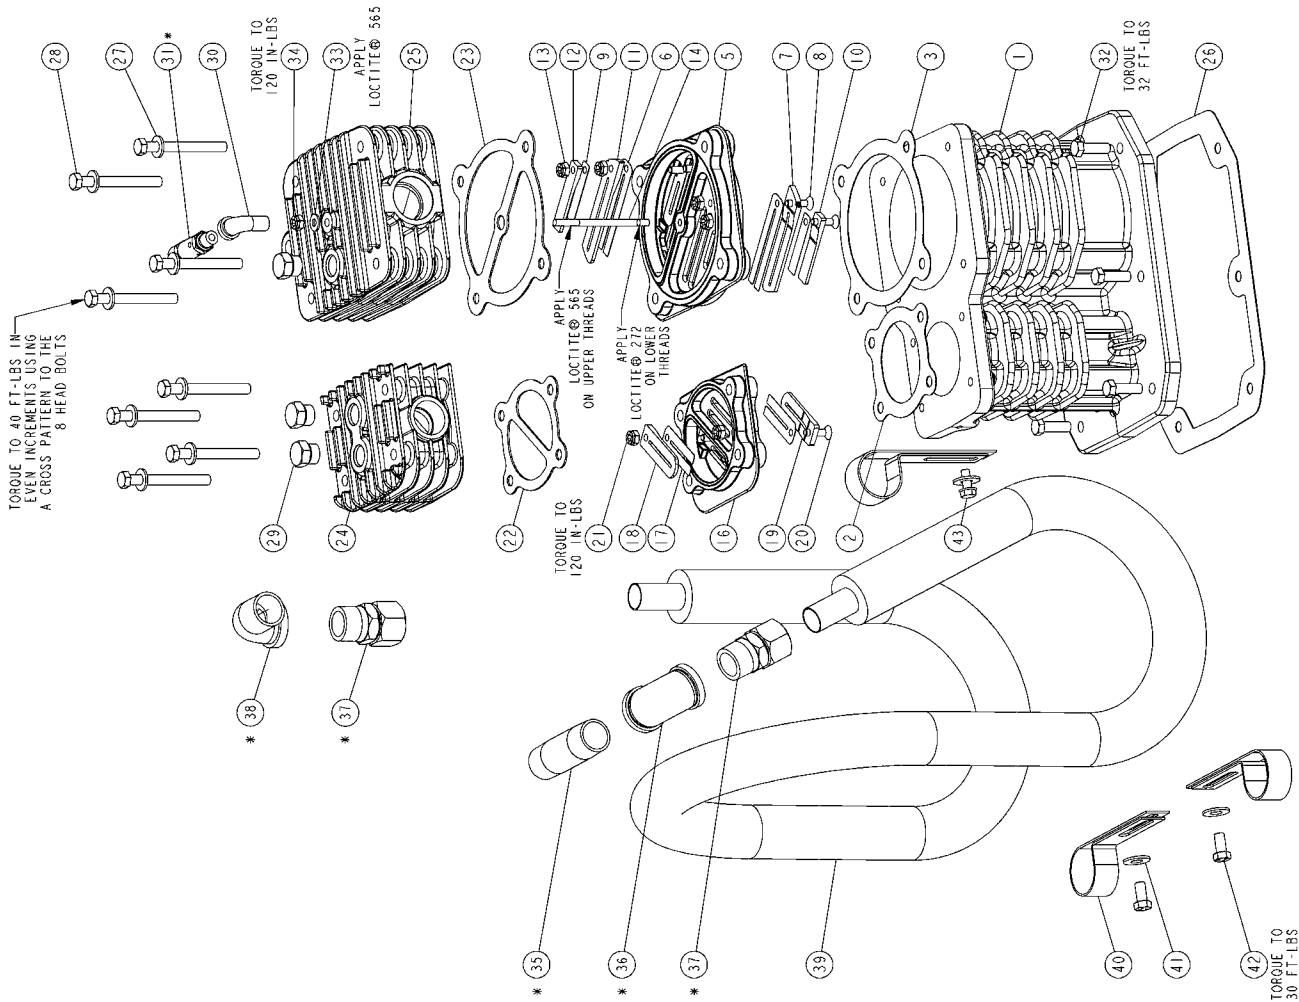


CYLINDER & HEAD GROUP 116178-001

(with head unloaders)


ITEM	PART NUMBER	QTY	HEAD AND CYLINDER GROUP, UNLOADERS	DESCRIPTION	BILL OF MATERIALS
1	116172	1	CYLINDER		
2	114599	1	GASKET, CYLINDER/PLATE, HP		
3	114585	1	GASKET, CYLINDER/PLATE, LP		
4	116162X	1	VALVE PLATE ASSEMBLY, LP		
5	116162-001	1	VALVE PLATE (N.S., ORDER V.P. ASSEMBLY)		
6	112380	2	REED VALVE (N.S., ORDER V.P. ASSEMBLY)		
7	112378-1	1	BUMPER (N.S., ORDER V.P. ASSEMBLY)		
8	112378-2	4	FLAT HEAD SCR. 1/4-20UNC X 1.00, GR 8		
9	112379	2	REED VALVE (N.S., ORDER V.P. ASSEMBLY)		
10	112379-1	1	BUMPER (N.S., ORDER V.P. ASSEMBLY)		
11	112378-3	1	BUMPER (N.S., ORDER V.P. ASSEMBLY)		
12	112379-1	1	BUMPER (N.S., ORDER V.P. ASSEMBLY)		
13	112373-J02	4	HEX NUT, 1/4-20 UNC		
14	114688	1	VALVE PLATE STUD		
15	116163X	1	VALVE PLATE ASSEMBLY, HP		
16	116163-001	1	VALVE PLATE (N.S., ORDER V.P. ASSEMBLY)		
17	112380-001	2	REED VALVE (N.S., ORDER V.P. ASSEMBLY)		
18	114645-002	1	BUMPER (N.S., ORDER V.P. ASSEMBLY)		
19	114645-003	1	BUMPER (N.S., ORDER V.P. ASSEMBLY)		
20	112728-J12	2	FLATHEAD SCR. 1/4-20UNC X 1.00, GR 8		
21	112373-J02	2	HEX NUT, 1/4-20 UNC		
22	11274-002	1	GASKET, HEAD - VALVE PLATE		
23	114586	1	GASKET, HEAD - VALVE PLATE		
24	11115-6	1	HEAD, HIGH PRESSURE		
25	114507	1	HEAD, LOW PRESSURE		
26	114584	1	GASKET, CYLINDER - CRANKCASE		
27	114595N038	8	FLAT WASHER, 3/8		
28	110983L126	8	HEX. SCREW, 3/8-16 UNC X 4.50, GRADE 8		
29	112709-006	1	PLUG, 3/4-16 UNF W/O RING		
30	123651-003	1	PIPE ELBOW, 90° STREET, 1/4 NPT x 1/4 NPT		
31	2961-100	1	PRESSURE RELIEF VALVE		
32	115037-L14	6	SCREW, CAP HEX, STALANT, GRADE 5		
33	114595N025	1	FLAT WASHER, 1/2		
34	112373-J02	1	HEX NUT, 1/4-20 UNC		
35	11450-026	1	BRASS NIPPLE, 1 NPT X 4.00		
36	115101-006	1	PIPE ELBOW, 1 NPT		
37	23358	2	TUBE FITTING, MALE CONN. 1 X 1 NPT		
38	21730-B	1	PIPE ELBOW, 90° STREET, 1 NPT x 1 NPT		
39	114508-001	1	INTERCOOLER		
40	114574	3	INTERCOOLER CLAMP		
41	110428W038	3	FLAT WASHER, 3/8		
42	123478-L10	2	HEX SCREW, 3/8-16 UNC X .75, GRADE 5		
43	114629-001	1	FLANGE SCREW, 5/16-18x0.75, GRADE 5		
44	114655X2	1	INTAKE UNLOADER		
45	112708-908	2	*O-RING, SILICONE		
46	11591X4	1	INTAKE UNLOADER		
47	124351-004	1	MALE BRANCH TEE 1/4T X 1/4P		
48	2768	1	TUBE FITTING, 90° ELBOW, 1/4T x 1/4P		
49	110515-025	1	1/4" COPPER TUBE (CUSTOMER TO BEND)		
MAINTENANCE PARTS					
114508K002	1	INTERCOOLER REPLACEMENT KIT: INCLUDES INTERCOOLER AND NUT/SLEEVE FITTING			
112708-908	3	O-RING, SILICONE (SEE ITEM 29.43)			
K0110H	1	HEAD KIT INCLUDES ITEMS 4, 15 & AIR FILTER ELEMENT			
110377S125	1	AIR FILTER / SILENCER			
110377E100	1	ELEMENT, AIR FILTER			

Sterling Blue Valve Kit 2022103900

Item #	Qty.	Part Number	Description
2	2	110258B080	drive belt
1	1	116162K	valve repair kit
1	1	116163K	valve repair kit

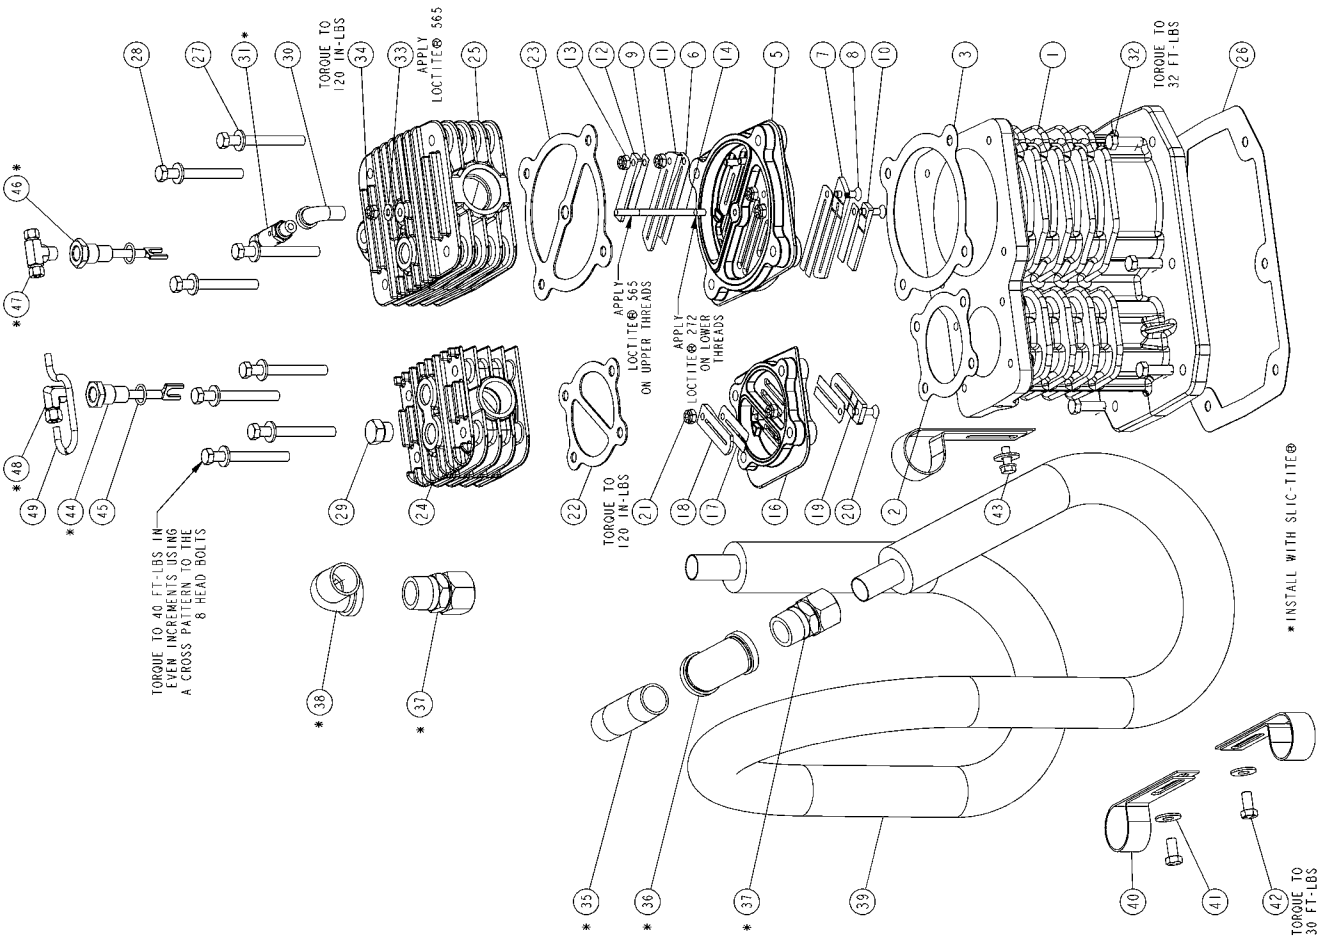



CONTROL PIPING SCHEMATICS

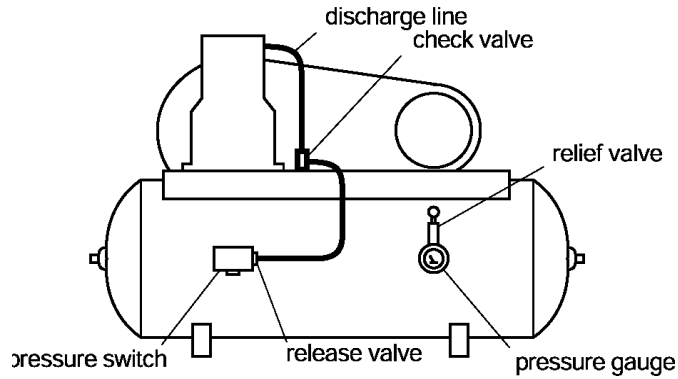

**Control Piping
For Automatic Start/Stop**

(with loadless starting)

**Control Piping
For Continuous Run**

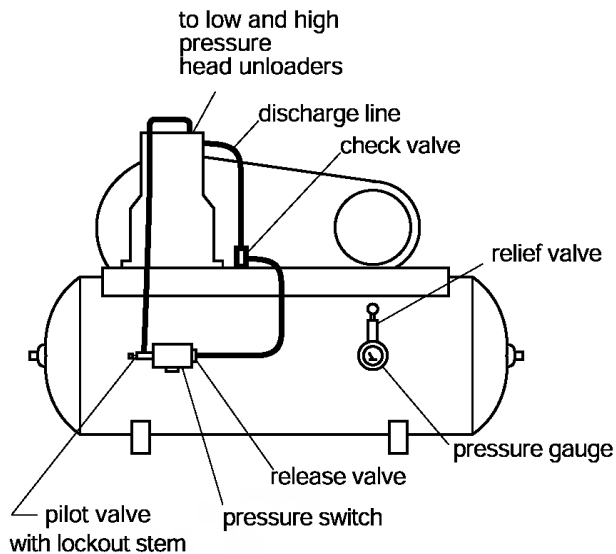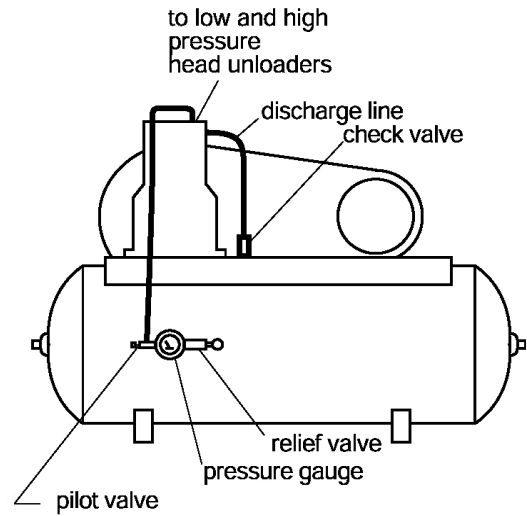


**Control Piping
For Dual Control**

*For Start / Stop operation
the pilot valve is open
(stem screwed out)*

*For Continuous Run operation
the pilot valve is closed
(stem screwed in)*


PILOT VALVES

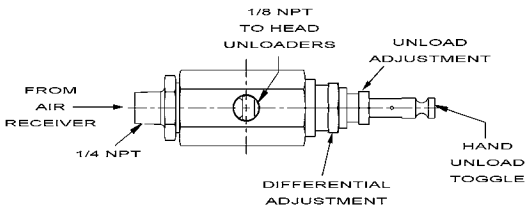

113708 Series Pilot Valve (continuous run operation)

Add dash # listed below to 113708 (per pressure setting) to obtain correct pilot valve.

Dash #	Load PSI	Unload PSI
-050	40	50
-075	65	75
-100	80	100
-100A	90	100
-110	100	110
-125	105	125
-140	130	140
-150	135	150
-175	165	175

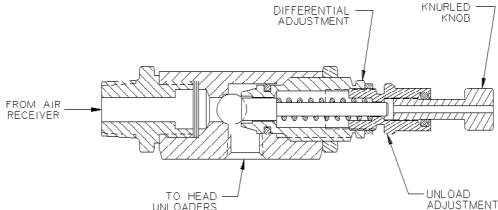

110998 Series Pilot Valve (dual control operation)

Add dash # listed below to 110998 (per pressure setting) to obtain correct pilot valve.

Dash #	Load PSI	Unload PSI
-045	35	45
-070	50	70
-085	75	85
-095	75	95
-100	90	100
-110	100	110
-115	100	115
-140	125	140
-140A	130	140
-150	135	150
-165	150	165
-165A	155	165
-175	165	175

Differential Setting Chart

Applies to 113708 & 110998 series pilot valves.

Unload (PSI)	Min. Dif. (PSI)	Max. Dif. (PSI)
40	2	5
60	3	10
100	4	20
150	5	30
175	5	45

WARNING !

Not all pilots are for use with all compressor systems. Make sure that the pilot you order is set within the safe operating limits of your compressor. Failure to heed this warning could result in an explosion.

SUCTION VALVE UNLOADER ASSEMBLIES

Description

The Quincy suction valve unloader assembly consists of unloading assemblies on the suction valves, having a plunger to contact the suction valve reed and an unloader pilot valve (113708 or 110998 series) to automatically regulate the passing of air tank pressure to the unloading arrangement.

Continuous Run Operation

Suction valve unloader assemblies are recommended for use on Quincy compressors where the compressor is to run continuously and a constant pressure is to be maintained. The purpose is to automatically unseat the suction valve of the compressor when the air supply is greater than the demand.

Unloading occurs when air tank pressure is sufficient to overcome pilot valve spring pressure. The check ball is then unseated, allowing air tank pressure to pass to the unloader assemblies. The compressor will run unloaded until the air tank pressure drops to a predetermined level. At this time, the action of the ball is reversed, shutting off air tank pressure to the unloader assemblies and venting the unloader to atmosphere. This allows the compressor to load. The drive, either electric motor or engine, runs continuously and must be started and stopped manually. 113708 series pilot valves feature a toggle lever which can be flipped to provide manual unloading.

Dual Control Operation

Dual control operation is designed to provide a choice between "start/stop" or "continuous run" operation. The 110998 series pilot valve can be set for "start/stop" operation by turning the knurled knob at the end of the pilot valve (*refer to illustration for 110998 series pilot valve*) clockwise until it stops. Under these circumstances, a pressure switch is required to stop the motor. Failure to use a pressure switch, with the pilot valve locked out, will result in unsafe conditions.

WARNING !

A pressure switch must be incorporated whenever 110998 series pilot valve is employed as part of the control system.

The compressor will operate in the continuous run mode if the knurled knob is turned counterclockwise until it stops.

Installation

The pilot valve is mounted directly into the air tank. Compressors in the field, not equipped with these controls, can be converted. Consult your local Quincy distributor for assistance with conversion procedures.

Service


If a change in pilot valve operation is detected, remove the pilot valve from the air tank and check the screen in the inlet of the pilot valve for obstructions. Clean the screen if necessary.

Adjustment

The unloading pressure is adjustable and is regulated by turning the unload adjustment hex nut (*refer to pilot valve illustrations*). Turn the hex nut clockwise to increase and counterclockwise to decrease the unloading pressure.

The differential (difference between unloading and loading pressure) is set by turning the differential adjustment hex nut (*refer to pilot valve illustrations*). Increase the differential pressure by turning the hex nut clockwise - decrease by turning counterclockwise. Make all adjustments in small increments. Tighten the locknuts after adjustment.

DECALS

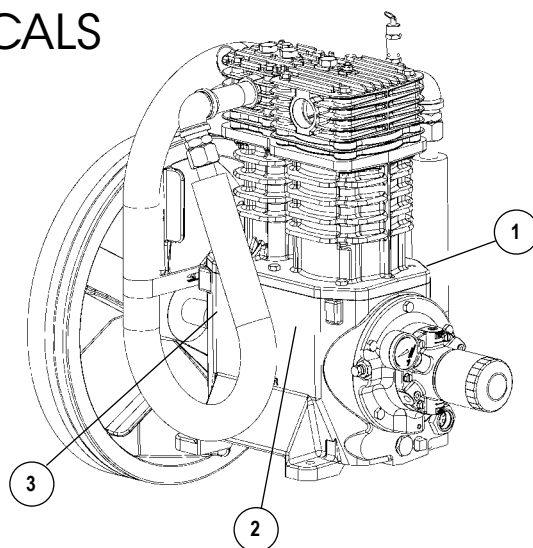

Decals			
Item #	Qty.	Part Number	Description
1	1	110831	serial number & nameplate
2	1	127889-A	decal, CAUTION!, MANUAL
3	1	127889-B	decal, DANGER!, "Air from this...."

TYPICAL UNIT REPAIR PARTS LIST

The parts listed here are for standard QP-10 units and may or may not be applicable to specially built units. Check with your local authorized Quincy distributor for parts that can be used for custom built units. Make sure the components you order are rated within the safe operating limits of your system. If you are doubtful about which components to order, contact your local Quincy distributor.

(QP-10 simplex - horizontal tank - electric motor)

Qty	Part Number	Part Number	Description
	80 gal.	120 gal.	
1	113268P200	113271P200	tank
1	n/a	113281	top plate
1	111136-025	111136-050	tank drain valve
1	111136-075	111136-100	service valve
1	110514-300	110514-300	pressure gauge
1	110512-005	110512-005	pressure switch, 135-175 PSI
1	110513-200	110513-200	pressure relief valve, 200 PSI (in tank)
1	2961-215	2961-215	pressure relief valve, 215 PSI (in discharge line)
1	116209-100	116209-100	check valve
4 ft.	110515-100	110515-100	discharge tube (1" copper tube to be formed by customer)
	10 h.p., 3Ø	10 h.p., 1Ø	
2	110258B080	110258B079	drive belt
1	110483	111241	motor pulley
1	110484	5380	bushing
1	113242K004	113242K004	belt guard assembly
	200v, 3Ø	230/460v, 3Ø	
1	40656	124517-027	10 h.p. motor (ODP)
	208v, 1Ø	230v, 1Ø	
1	127466K174	127466K045	10 h.p. motor (ODP)

(QP-10 simplex - vertical tank - electric motor)

Qty	Part Number	Part Number	Description
	120 gal.		
1	114859P200		tank
1	n/a		top plate
1	110425-050		tank drain valve
1	111136-100		service valve
1	110514-300		pressure gauge
1	110512-005		pressure switch, 135-175 PSI
1	110513-200		pressure relief valve, 200 PSI (in tank)
1	2961-215		pressure relief valve, 215 PSI (in discharge line)
1	116209-100		check valve
4 ft.	110515-100		discharge tube (1" copper tube to be formed by customer)
	10 h.p., 3Ø	10 h.p., 1Ø	
2	110258B080	110258B079	drive belt
1	110483	111241	motor pulley
1	110484	5380	bushing
1	113242K004	113242K004	belt guard assembly
	200v, 3Ø	230/460v, 3Ø	
1	40656	124517-027	10 h.p. motor (ODP)
	208v, 1Ø	230v, 1Ø	
1	127466K174	127466K045	10 h.p. motor (ODP)

Part numbers shown in italics apply to tank mounted units and base mounted units.

TYPICAL UNIT REPAIR PARTS LIST

The parts listed here are for standard QP-10 units and may or may not be applicable to specially built units. Check with your local authorized Quincy distributor for parts that can be used for custom built units. Make sure the components you order are rated within the safe operating limits of your system. If you are doubtful about which components to order, contact your local Quincy distributor.

(QP-10 duplex - horizontal tank - electric motor)

Qty	Part Number	Part Number	Description
	200 gal.	240 gal.	
1	113468P200	113470P200	tank
2	113281	113281	top plate
1	111136-050	111136-050	tank drain valve
1	111136-100	111136-100	service valve
1	110514-300	110514-300	pressure gauge
1	110512-005	110512-005	pressure switch, 135-175 PSI
1	110512-003	110512-003	pressure switch, 120-150 PSI
1	110513-200	110513-200	pressure relief valve, 200 PSI (in tank)
2	2961-215	2961-215	pressure relief valve, 215 PSI (in discharge line)
2	116209-100	116209-100	check valve
12 ft.	110515-100	110515-100	discharge tube (1" copper tube to be formed by customer)
	10 h.p. , 3Ø	10 h.p. , 1Ø	
2	<i>110258B080</i>	<i>110258B079</i>	drive belt
1	<i>110483</i>	<i>111241</i>	motor pulley
1	<i>110484</i>	<i>5380</i>	bushing
1	<i>113242K004</i>	<i>113242K004</i>	belt guard assembly
	200v, 3Ø	230/460v, 3Ø	
2	<i>40656</i>	<i>124517-027</i>	10 h.p. motor (ODP)

Part numbers shown in italics apply to tank mounted units and base mounted units.

QUINCY COMPRESSOR

STANDARD TERMS AND CONDITIONS

LEGAL EFFECT: Except as expressly otherwise agreed to in writing by an authorized representative of Seller, the following terms and conditions shall apply to and form a part of this order and any additional and/or different terms of Buyer's purchase order or other form of acceptance are rejected in advance and shall not become a part of this order.

The rights of Buyer hereunder shall be neither assignable nor transferable except with the written consent of Seller.

This order may not be canceled or altered except with the written consent of Seller and upon terms which will indemnify Seller against all loss occasioned thereby. All additional costs incurred by Seller due to changes in design or specifications, modification of this order or revision of product must be paid for by Buyer.

In addition to the rights and remedies conferred upon Seller by this order, Seller shall have all rights and remedies conferred at law and in equity and shall not be required to proceed with the performance of this order if Buyer is in default in the performance of such order or of any other contract or order with seller.

TERMS OF PAYMENT: Unless otherwise specified in the order acknowledgment, the terms of payment shall be 1% 15, net forty-five (45) days after shipment. These terms shall apply to partial as well as complete shipments. If any proceeding be initiated by or against Buyer under any bankruptcy or insolvency law, or in the judgment of Seller the financial condition of Buyer, at the time the equipment is ready for shipment, does not justify the terms of payment specified, Seller reserves the right to require full payment in cash prior to making shipment. If such payment is not received within fifteen (15) days after notification of readiness for shipment, Seller may cancel the order as to any unshipped item and require payment of its reasonable cancellation charges.

If Buyer delays shipment, payments based on date of shipment shall become due as of the date when ready for shipment. If Buyer delays completion of manufacture, Seller may elect to require payment according to percentage of completion. Equipment held for Buyer shall be at Buyer's risk and storage charges may be applied at the discretion of Seller.

Accounts past due shall bear interest at the highest rate lawful to contract for but if there is no limit set by law, such interest shall be eighteen percent (18%). Buyer shall pay all cost and expenses, including reasonable attorney's fees, incurred in collecting the same, and no claim, except claims within Seller's warranty of material or workmanship, as stated below, will be recognized unless delivered in writing to Seller within thirty (30) days after date of shipment.

TAXES: All prices exclude present and future sales, use, occupation, license, excise, and other taxes in respect of manufacture, sales or delivery, all of which shall be paid by Buyer unless included in the purchase price at the proper rate or a proper exemption certificate is furnished.

ACCEPTANCE: All offers to purchase, quotations and contracts of sales are subject to final acceptance by an authorized representative at Seller's plant.

DELIVERY: Except as otherwise specified in this quotation, delivery will be F. O. B. point of shipment. In the absence of exact shipping instruction, Seller will use its discretion regarding best means of insured shipment. No liability will be accepted by Seller for so doing. All transportation charges are at Buyer's expense. Time of delivery is an estimate only and is based upon the receipt of all information and necessary approvals. The shipping schedule shall not be construed to limit seller in making commitments for materials or in fabricating articles under this order in accordance with Seller's normal and reasonable production schedules.

Seller shall in no event be liable for delays caused by fires, acts of God, strikes, labor difficulties, acts of governmental or military authorities, delays in transportation or procuring materials, or causes of any kind beyond Seller's control. No provision for liquidated damages for any cause shall apply under this order. Buyer shall accept delivery within thirty (30) days after receipt of notification of readiness for shipment. Claims for shortages will be deemed to have been waived if not made in writing with ten (10) days after the receipt of the material in respect of which any such shortage is claimed. Seller is not responsible for loss or damage in transit after having received "In Good Order" receipt from the carrier. All claims for loss or damage in transit should be made to the carrier.

TITLE & LIEN RIGHTS: The equipment shall remain personal property, regardless of how affixed to any realty or structure. Until the price (including any notes given therefore) of the equipment has been fully paid in cash, Seller shall, in the event of Buyer's default, have the right to repossess such equipment.

PATENT INFRINGEMENT: If properly notified and given an opportunity to do so with friendly assistance, Seller will defend Buyer and the ultimate user of the equipment from any actual or alleged infringement of any published United States patent by the equipment or any part thereof furnished pursuant hereto (other than parts of special design, construction, or manufacture specified by and originating with Buyer), and will pay all damages and costs awarded by competent court in any suit thus defended or of which it may have had notice and opportunity to defend as aforesaid.

STANDARD WARRANTY: Seller warrants that products of its own manufacture will be free from defects in workmanship and materials under normal use and service for the period specified in the product instruction manual. Warranty for service parts will be Ninety (90) days from date of factory shipment. Electric Motors, gasoline and diesel engines, electrical apparatus and all other accessories, components and parts not manufactured by Seller are warranted only to the extent of the original manufacturer's warranty.

Notice of the alleged defect must be given to the Seller, in writing with all identifying details including serial number, type of equipment and date of purchase within thirty (30) days of the discovery of the same during the warranty period.

Seller's sole obligation on this warranty shall be, at its option, to repair or replace or refund the purchase price of any product or part thereof which proves to be defective. If requested by Seller, such product or part thereof must be promptly returned to seller, freight prepaid, for inspection.

Seller warrants repaired or replaced parts of its own manufacture against defects in materials and workmanship under normal use and service for ninety (90) days or for the remainder of the warranty on the product being repaired.

This warranty shall not apply and Seller shall not be responsible or liable for:

- (a) Consequential, collateral or special losses or damages;
- (b) Equipment conditions caused by fair wear and tear, abnormal conditions of use, accident, neglect or misuse of equipment, improper storage or damage resulting during shipping;
- (c) Deviation from operating instructions, specifications or other special terms of sale;
- (d) Labor charges, loss or damage resulting from improper operation, maintenance or repairs made by person(s) other than Seller or Seller's authorized service station.

In no event shall Seller be liable for any claims whether arising from breach of contract or warranty or claims of negligence or negligent manufacture in excess of the purchase price.

THIS WARRANTY IS THE SOLE WARRANTY OF SELLERS AND ANY OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED IN LAW OR IMPLIED IN FACT, INCLUDING ANY WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR USE ARE HEREBY SPECIFICALLY EXCLUDED.

LIABILITY LIMITATIONS: Under no circumstances shall the Seller have any liability for liquidated damages or for collateral, consequential or special damages or for loss of profits, or for actual losses or for loss of production or progress of construction, whether resulting from delays in delivery or performance, breach of warranty, negligent manufacture or otherwise.

ENVIRONMENTAL AND OSHA REQUIREMENTS: At the time of shipment of the equipment from the factory, Quincy Compressor / Ortman Fluid Power will comply with the various Federal, State and local laws and regulations concerning occupational health and safety and pollution. However, in the installation and operation of the equipment and other matters over which the seller has no control, the Seller assumes no responsibility for compliance with those laws and regulations, whether by the way of indemnity, warranty or otherwise.

June 30, 2003



Reciprocating / Systems: 217.222.7700
E-mail: info@quincycompressor.com
Website: quincycompressor.com

