



A075V080-1230

7.5 HP

2 STAGE

27.3 CFM @175psi

35" x 24" x 73"

670 RPM

555 LBS.

- 2-3 Person Body Shop
- 3-5 Person Auto Repair Shop
- Small Manufacturing Plant
- Farm

Also Available:
**EXTENDED
WARRANTY KIT**
(Part# AX-W95)



Commercial/Industrial Use

Quality. Value. Quiet. These three words are the reason this unit is our top seller. This model features a high output 3 cylinder cast iron pump with over 8 1/2' of finned inter-stage tubing for extra cooling. The low pump speed of 670 RPM means the compressor runs quieter (80 dB), cooler, more efficiently and lasts longer.

7.5 HP Single Phase/230v Motor

- 33 Running amps (Requires 50 amp breaker)
- Heavy Duty Motor
- Pre-wired Magnetic Starter
- Also available in 3 Phase/230v or 460v

Large Displacement 3 Cylinder Pump

- Only 670 RPM
- 27.3 CFM @175 PSI
- Over 8 1/2' of Finned Intercooling for improved efficiency
- Solid Cast Iron Cylinders and Crankcase
- Rod Inserts and Ball Bearing Mains

80 Gallon Vertical Tank


- ASME Certified
- Also available on a horizontal tank

Don't Forget an Installation Kit!

- INSTALL-80V
- 4 Mounting Pads
- Steel Braided Flex Hose
- 4 Anchor Bolts
- Ball Valve Drain Kit

Fully Packaged, Fully Set!

Make sure your C-Aire compressor is set up correctly from the start! C-Aire's Fully Packaged Compressors include a factory installed Belt Guard Mounted Aftercooler and Moisture Minder Auto Tank Drain. This is the most affordable way to significantly reduce moisture and prolong the life and effectiveness of your pneumatic tools by removing approximately 60% of the moisture in your compressed air. Fully Packaged units also include an Installation Kit.

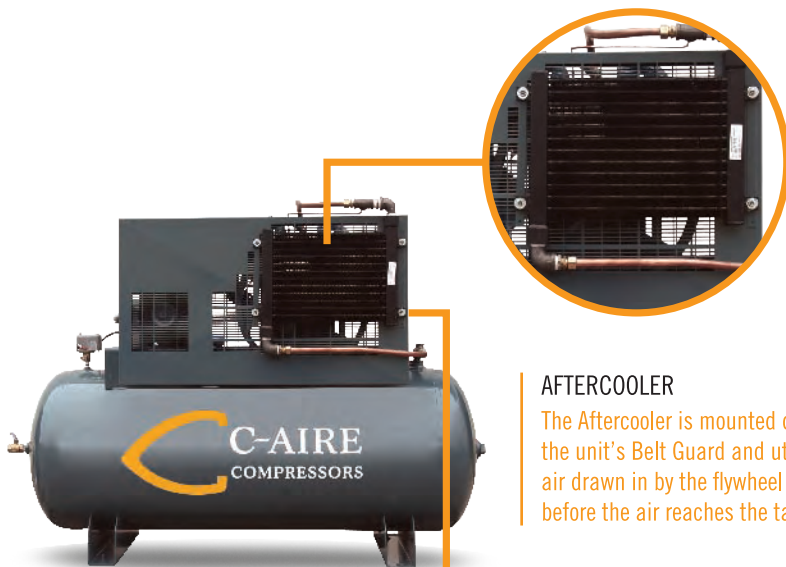


AFTERCooler

The Aftercooler is mounted directly to the unit's Belt Guard and utilizes the air drawn in by the flywheel for cooling before the air reaches the tank.



AUTOMATIC TANK DRAIN

The Automatic Tank Drain operates each time the compressor cycles, stores condensation without wasting air, prevents valves from fouling and reduces corrosion.

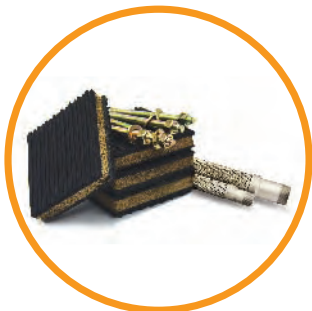

INSTALLATION KIT

4 Mounting Pads
4 Anchor Bolts
Steel Braided Flex Hose

NEXT SIZE **UP**



A100H120-3230

10 HP

2 STAGE

38.2 CFM

839 RPM

120 GALLON TANK

MAGNETIC STARTER

- 3-5 Person Body Shop
- 4-7 Person Auto Repair Shop
- Tire Shop or Truck Repair
- Small Manufacturing Plant

NEXT SIZE **DOWN**

A050V080-1230

5 HP

2 STAGE

17.7 CFM

970 RPM

80 GALLON TANK

MAGNETIC STARTER

- 1-2 Person Body Shop
- 2-3 Person Auto Repair Shop
- 2-3 Person Woodworking Shop
- Car Wash



Quality built... *because quality lasts.*