
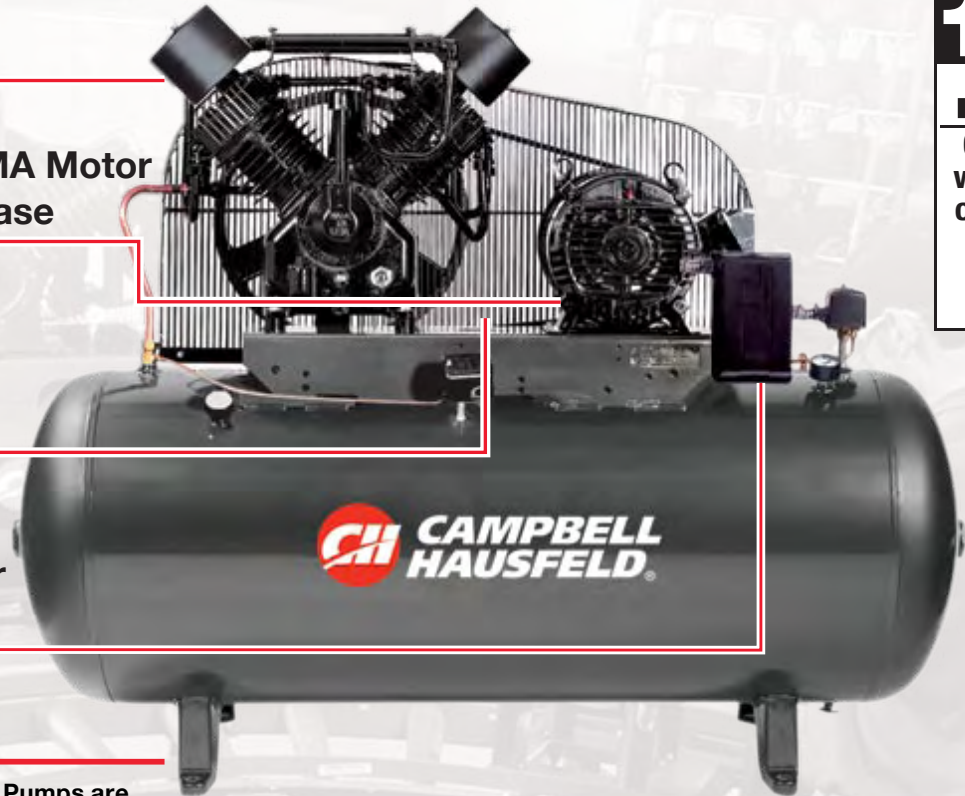



**Cast Iron Two Stage Pump**

**15 HP, Tri-Voltage NEMA Motor  
208-230/460 volt, 3 phase**

**Totally Enclosed Metal Belt Guard**

**Mounted Motor Starter  
(model CE8003 only)**

**175  
MAX  
PSI**

Operates a wider range of tools and provides longer run time

## FEATURES

- Cast Iron Two-Stage Pump:
  - stainless steel valves
  - ductile iron crankshaft
  - oil sight glass
  - low pump RPM
  - precision balanced flywheel
- Delivers 54.4 CFM @ 90 PSI
- 120 Gallon ASME Tank
- Motor Starter Premounted & Wired Available

\* based on B-10 bearing rating

## BENEFITS

- Campbell Hausfeld Two-Stage Pumps are designed and constructed for heavy duty commercial and industrial applications. Delivers up to 15,000+ hours of pump life.\*
- Excellent air delivery for commercial, industrial, and automotive applications.
- Certified for 200 PSI maximum pressure. Assures safe operation.
- Saves time and money during installation

## Specifications

Model No.	HP	CFM@90	CFM@Max	PSI Max	Pump RPM	Voltage-PH	Tank Capacity	Weight
CE8002	15	54.4	51	175	1020	208-230/460_3Ph	120 Gallon	908 lbs.
CE8003	15	54.4	51	175	1020	208-230/460_3Ph	120 Gallon	908 lbs.



**3 YEAR  
LIMITED  
WARRANTY**  
\*Refer to owner's manual