

**NEW!**

# Premium Efficiency 3 Phase Motors



## TWO STAGE VERTICAL 5HP-10HP Industrial Compressors

All options below are included.

Since 1977

**BALDOR  
MOTORS AND DRIVES**




### PISTON SERIES

- Quiet, low RPM Solid Cast Iron construction for extended life - up to 50,000 hours\*



Flow-Tek™ Concentric Disc Valves for Maximum Performance & Longevity

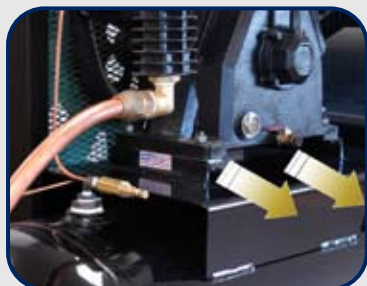

Air-Stream Technology™ For up to 50% longer life



Auto Tank Drain eliminates daily maintenance

Contact:



[www.EmaxCompressor.com](http://www.EmaxCompressor.com)  
 1000 Cass Drive  
 Clayton, Ohio 45315  
 Toll Free: 866-294-4153  
 Fax: 937-540-1150  
[sales@emaxcompressor.com](mailto:sales@emaxcompressor.com)



### Energy efficiency & MAXimum performance

Dual Control:  
Automatic and  
Continuous Run

Gate Valve Oil Drain:  
Provides quick, clean,  
oil changes



Magnetic Starter

EP07V080V1

EP05V08011

EP10V120Y1



\*\* Made In The USA

### Features & Benefits

- Cool-Tek: The coolest running compressors in the industry – 35% lower operating temperature reduces moisture build up & extends pump life
- Belt Tension Adjuster: Fast, easy “one turn” way to tighten belts which reduces vibration and extends belt life

Model	EP05V08011	EP07V080V1	EP10V120Y1	EP07V080V3	EP10V120Y3
Running HP	5	7.5	10	7.5	10
SCFM @ 175 PSI	17	26	35	26	35
Pump RPM	800	600	640	600	640
Power (Voltage)	208/230	208/230	208/230	208/230/460/575	208/230/460/575
Noise DB(A)	73	73	76	73	76
Tank size (Gallons)	80	80	120	80	120
Maximum PSI	175	175	175	175	175
Pump Model	APP2I0524T	APP4V1043T	APP3Y1544T	APP4V1043T	APP3Y1544T
Outlet	NPT 3/4"	NPT 3/4"	NPT 1"	NPT 3/4"	NPT 1"
Weight (lbs.)	710	950	1083	950	1083
Dimensions: LxWxH	34"x24"x73"	34"x24"x73"	45"x35"x76"	34"x24"x73"	45"x35"x76"

\* Based on B-10 Bearing Rating

5YR - Limited warranty on oil-lubricated air compressor pumps and tanks.

2YR - Limited warranty on all air compressor components.

\*\*Does not apply to models featuring the WEG motor



ASME International

PIXPT0510V 02/2011