

Please carefully read and save these instructions before attempting to assemble, maintain, install, or operate this product. Observe all safety information to protect yourself and others. Failure to observe the instructions may result in property damage and/or personal injury. Please keep instructions for future reference.

Important Operating Instructions



4 in 1 POWER STATION

Model: 7226

CALIFORNIA PROPOSITION 65
WARNING: You can create dust when you cut, sand, drill or grind materials such as wood, paint, metal, concrete, cement, or other masonry. This dust often contains chemicals known to cause cancer, birth defects, or other reproductive harm. Wear protective gear.
WARNING: This product or its power cord may contain chemicals, including lead, known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands after handling.

CAUTION:

FOR YOUR OWN SAFETY
READ INSTRUCTION MANUAL
COMPLETELY AND
CAREFULLY BEFORE
OPERATING THIS TOOLS
Failure to follow all instructions as listed below may result in electrical shock, fire, and/or serious personal injury.

SPECIFICATIONS:

Air Compressor: 260 PSI
Start Amps: 400
Peak Amps: 900
Battery: 12 V, 17 Ah, Lead-Acid, Rechargeable
Booster Cables: #4 Gauge

SAFETY WARNINGS

1. Keep work area clean. Cluttered areas invite injuries.
2. Observe work area conditions. Do not use machines or power tools in damp or wet locations. Don't expose to rain. Keep work area well lighted. Do not use in the presence of flammable gases or liquids.
3. Keep children away. Children must never be allowed in the work area. Do not let them handle this product.
4. Store idle equipment. When not in use, tools must be stored in a dry location to inhibit rust. Always lock up tools and keep out of reach of children.
5. Use the right tool for the job. Do not attempt to force a small tool or attachment to do the work of a larger industrial tool. There are certain applications for which this tool was designed. It will do the job better and more safely at the rate for which it was intended. Do not modify this tool and do not use this tool for a purpose for which it was not intended.
6. Dress properly. Do not wear loose clothing or jewelry as they can be caught in moving parts. Protective, electrically non-conductive clothes and non-skid footwear are recommended when working. Wear restrictive hair covering to contain long hair.
7. Wear ANSI-approved splash-resistant safety goggles.
8. Do not overreach. Keep proper footing and balance at all times.
9. Maintain tools with care. Keep tools clean for better and

For warranty purchase, please keep your dated proof of purchase. File or attach to the manual for safekeeping.

safer performance. Follow instructions for lubricating and changing accessories. Inspect tool cords periodically and, if damaged, have them repaired by an authorized technician. The handles must be kept clean, dry, and free from oil and grease at all times.

10. Stay alert. Watch what you are doing, use common sense. Do not operate any tool when you are tired.

11. Check for damaged parts. Before using any tool, any part that appears damaged should be carefully checked to determine that it will operate properly and perform its intended function. Check for alignment and binding of moving parts; any broken parts or mounting fixtures; and any other condition that may affect proper operation. Any part that is damaged should be properly repaired or replaced by a qualified technician. Do not use the tool if any switch does not turn On and Off properly.

12. Replacement parts and accessories. When servicing, use only identical replacement parts. Use of any other parts will void the warranty. Only use accessories intended for use with this tool.

13. Do not operate tool if under the influence of alcohol or drugs. Read warning labels if taking prescription medicine to

determine if your judgement or reflexes are impaired while taking drugs. If there is any doubt, do not operate the Jump-Start.

14. Maintenance. For your safety, maintenance should be performed regularly by a qualified technician.

15. If you come in contact with battery acid, immediately wash the effected area with cool, clean water. Call for medical assistance and continue flushing the effected areas until medical help arrives.

16. The ON/Off switch (See FIGURE 1 next page) regulates power to the clamps only. Keep it in the "Off" position except when jumpstarting.

17. Lead-acid batteries vent hydrogen gas during normal operation and charging. Hydrogen is highly flammable and explosive. Charge batteries only in a well-ventilated area.

18. Do not allow the red and black clamps to come in contact with each other or the same metal object.

19. When charging, first connect the red (+) clamp to the positive (+) battery terminal.

20. Connect the negative (-) clamp to a non-moving metal engine part for negative ground systems.

21. Only use the charger on 12 V systems on vehicles or boats.

22. Do not use as a replacement for a vehicle battery.

23. The warnings, cautions, and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.


24. People with pacemakers should consult their physician(s) before use. Electromagnetic fields in close proximity to heart pacemaker could cause pacemaker interference or pacemaker failure.

Controls and Components.

FIGURE 1 (FRONT)



FIGURE 2 (BACK)

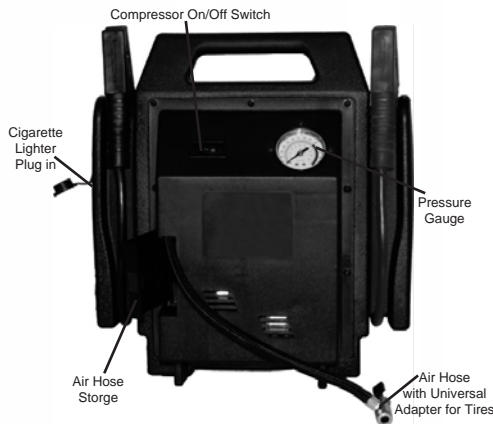

CHARGING AND RECHARGING INSTRUCTIONS

Note: After purchase and before initial use, fully charge the Jump-Start battery until the test meter shows full (14 to 15V DC)

WARNING! The ON/Off switch (See FIGURE 1) regulates power to the clamps only. Keep it in the "Off" position except when jumpstarting.

A) Charging with 120 volt AC Charger:

- 1) Insert the 120 volt AC charger plug into the unit's Recharging Receptacle.
- 2) Insert the 120 volt AC charger transformer plug into a 120 volt AC receptacle.
- 3) When the charging is complete, remove the charge adapter plug first and then the plug from the Recharging Receptacle on the unit.

B) Recharging with the 12 Volt DC Charger:

- 1) Insert the 12 volt DC charger plug into the unit's Recharging Receptacle.
- 2) Insert the charger accessory plug into the vehicle cigarette lighter or accessory socket.
- 3) When charging the complete, unplug the accessory plug first and then the charger plug from the Recharging Receptacle.

Operation

Using the Jump-Start as a 12 VDC power source

Warning!! The ON/Off switch (See FIGURE 1) regulates power to the clamps only. Keep it in the "Off" position except when jumpstarting.

1. Insert the 12 VDC Cigarette Lighter plug from the appliance into the 12 VDC Cigarette Lighter Receptacle on the side of the unit. See FIGURE 3.

FIGURE 3



Note: Table 1 gives approximate operating times when beginning with a fully charged system.

Appliance type	Estimated power consumption (in watts)	Estimated usage time (in hours)
Fluorescent lights cell phones	4	30
Radios, fans, depth finders	9	21
Camcorders, VCR's spotlights	15	12
Electric tools, bilge pumps	24	7
Electric coolers	48	3
Air compressors, car vacuums	80	1.5

Table 1

Jump Starting a Vehicle:

1. Attach the red (+) Booster Cable Clamp to the red (+) positive battery terminal.
 2. Attach the black (-) Booster Cable Clamp to a non-moving metal engine part on negative ground systems.
 3. Turn the On/Off switch (see 3. FIGURE 1) to "On".
 4. Turn the ignition to "On"-Accessory (not start) and wait a couple of minutes.
 5. Attempt to start the engine for no more than 5-6 seconds.
 6. If the vehicle does not start, wait at least three minutes until trying again. Repeated attempts may flood the engine or wear out the engine starter. If unable to start, replace the battery.
- WARNING! Do not let the black and red clamps to touch each other or a common metal conductor.
7. When the engine is running, switch off the unit.
 8. Disconnect the black (-) Booster Cable Clamp and return it to its position on the Jump-Start. Then, disconnect the red (+) Booster Cable Clamp and return it to its position on the Jumpstarter.

9. After each jump start, fully recharge the Jump-Start battery until the battery meter shows full (14 to 15 DC).

Compressor Usage:

WARNING! Do not run the compressor for more than ten minutes at a time or it will overheat resulting in damage. Allow it to cool for ten minutes between each use.

1. Turn the On/Off switch on the front of 1. the unit to "Off".
2. Pull out the compressor hose from its storage location. See FIGURE 2.
3. For inflating tires, attach the universal adapter on the end of the hose to the tire stem and position the adapter lever down to lock it on the stem.

Note: If you wish to inflate toys, rafts, balls etc., attach a needle or plastic adapter to the universal adapter.

4. Determine the tire pressure by reading the specifications listed on the tire. If filling something other than a tire, read the instruction manual to determine the correct air pressure.

WARNING! EXPLOSION DANGER. Do not overinflate.

. Turn the switch on. See FIGURE 2.

6. Watch Pressure Gauge (see FIGURE 2) to determine the proper pressure.
7. When the proper pressure is achieved, turn off the compressor and remove the adapter from the tire or other item being inflated.

Maintenance

Note: The main power switch should be off during any maintenance. Do not perform maintenance while charging.

1. Keep the unit clean and make sure the clamps are free of dirt, debris, or grease.
2. For a longer working life, protect from sunlight and moisture.
3. Lead-Acid batteries must be recycled or disposed of properly. Do not short terminals. Do not incinerate. Risk of electric shock; use only in dry location.

Limited Manufacturer Warranty

North American Tool (NAT) Industries makes every effort to ensure that this product meets high quality and durability standards. NAT warrants to the original retail consumer a 1-year limited warranty from the date the product was purchased at retail and each product is free from defects in materials. Warranty does not apply to defects due directly or indirectly to misuse, abuse, negligence or accidents, repairs or alterations, or a lack of maintenance. NAT shall in no event be liable for death, injuries to persons or property, or for incidental, special or consequential damages arising from the use of our products. To receive service under warranty, the original manufacturer part must be returned for examination by an authorized service center. Shipping and handling charges may apply. If a defect is found, NAT will either repair or replace the product at its discretion.

DO NOT RETURN TO STORE

For Customer Service:

Email: feedback@natitools.com or Call 1-800-348-5004