

1 2 3 4 5 6 7 8

A






B

C

D

E

F

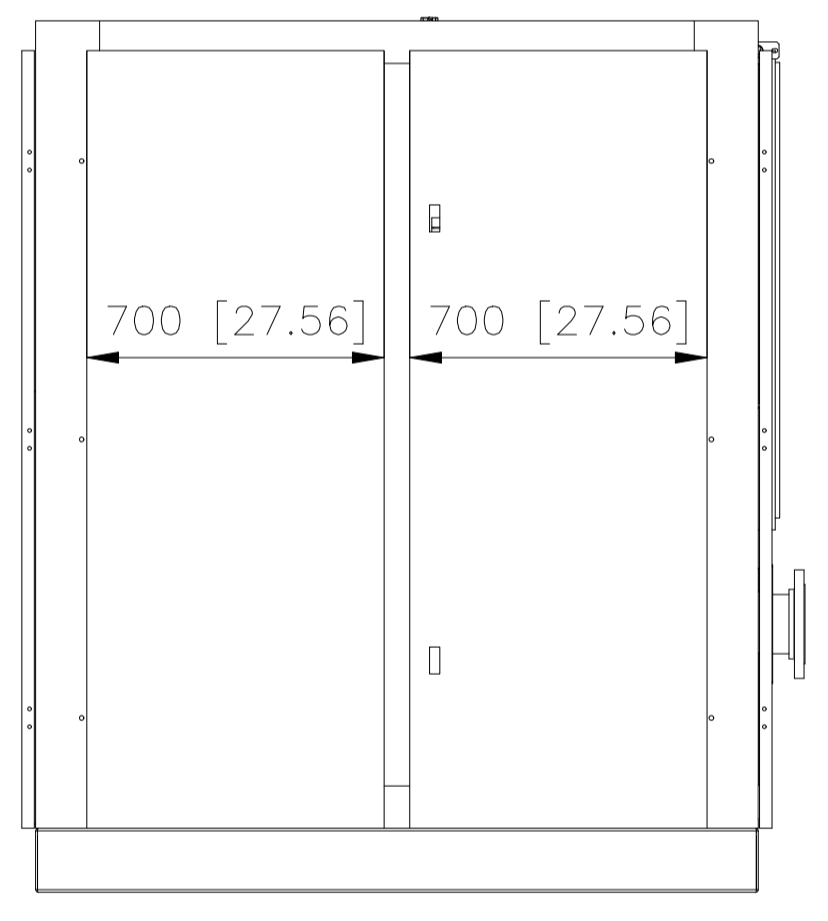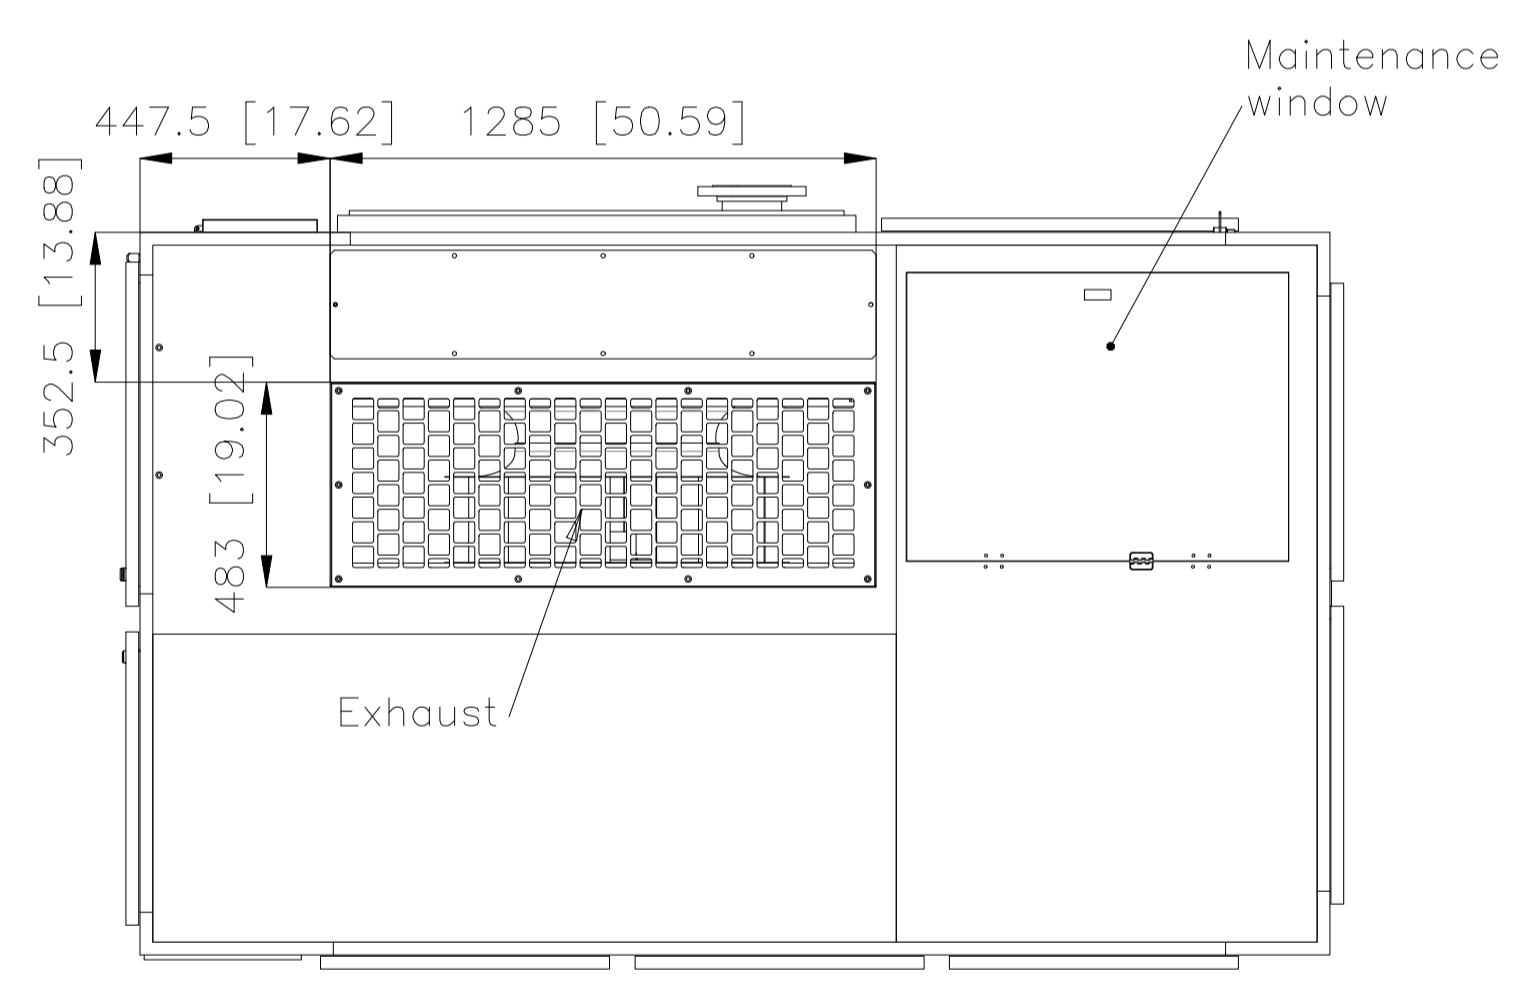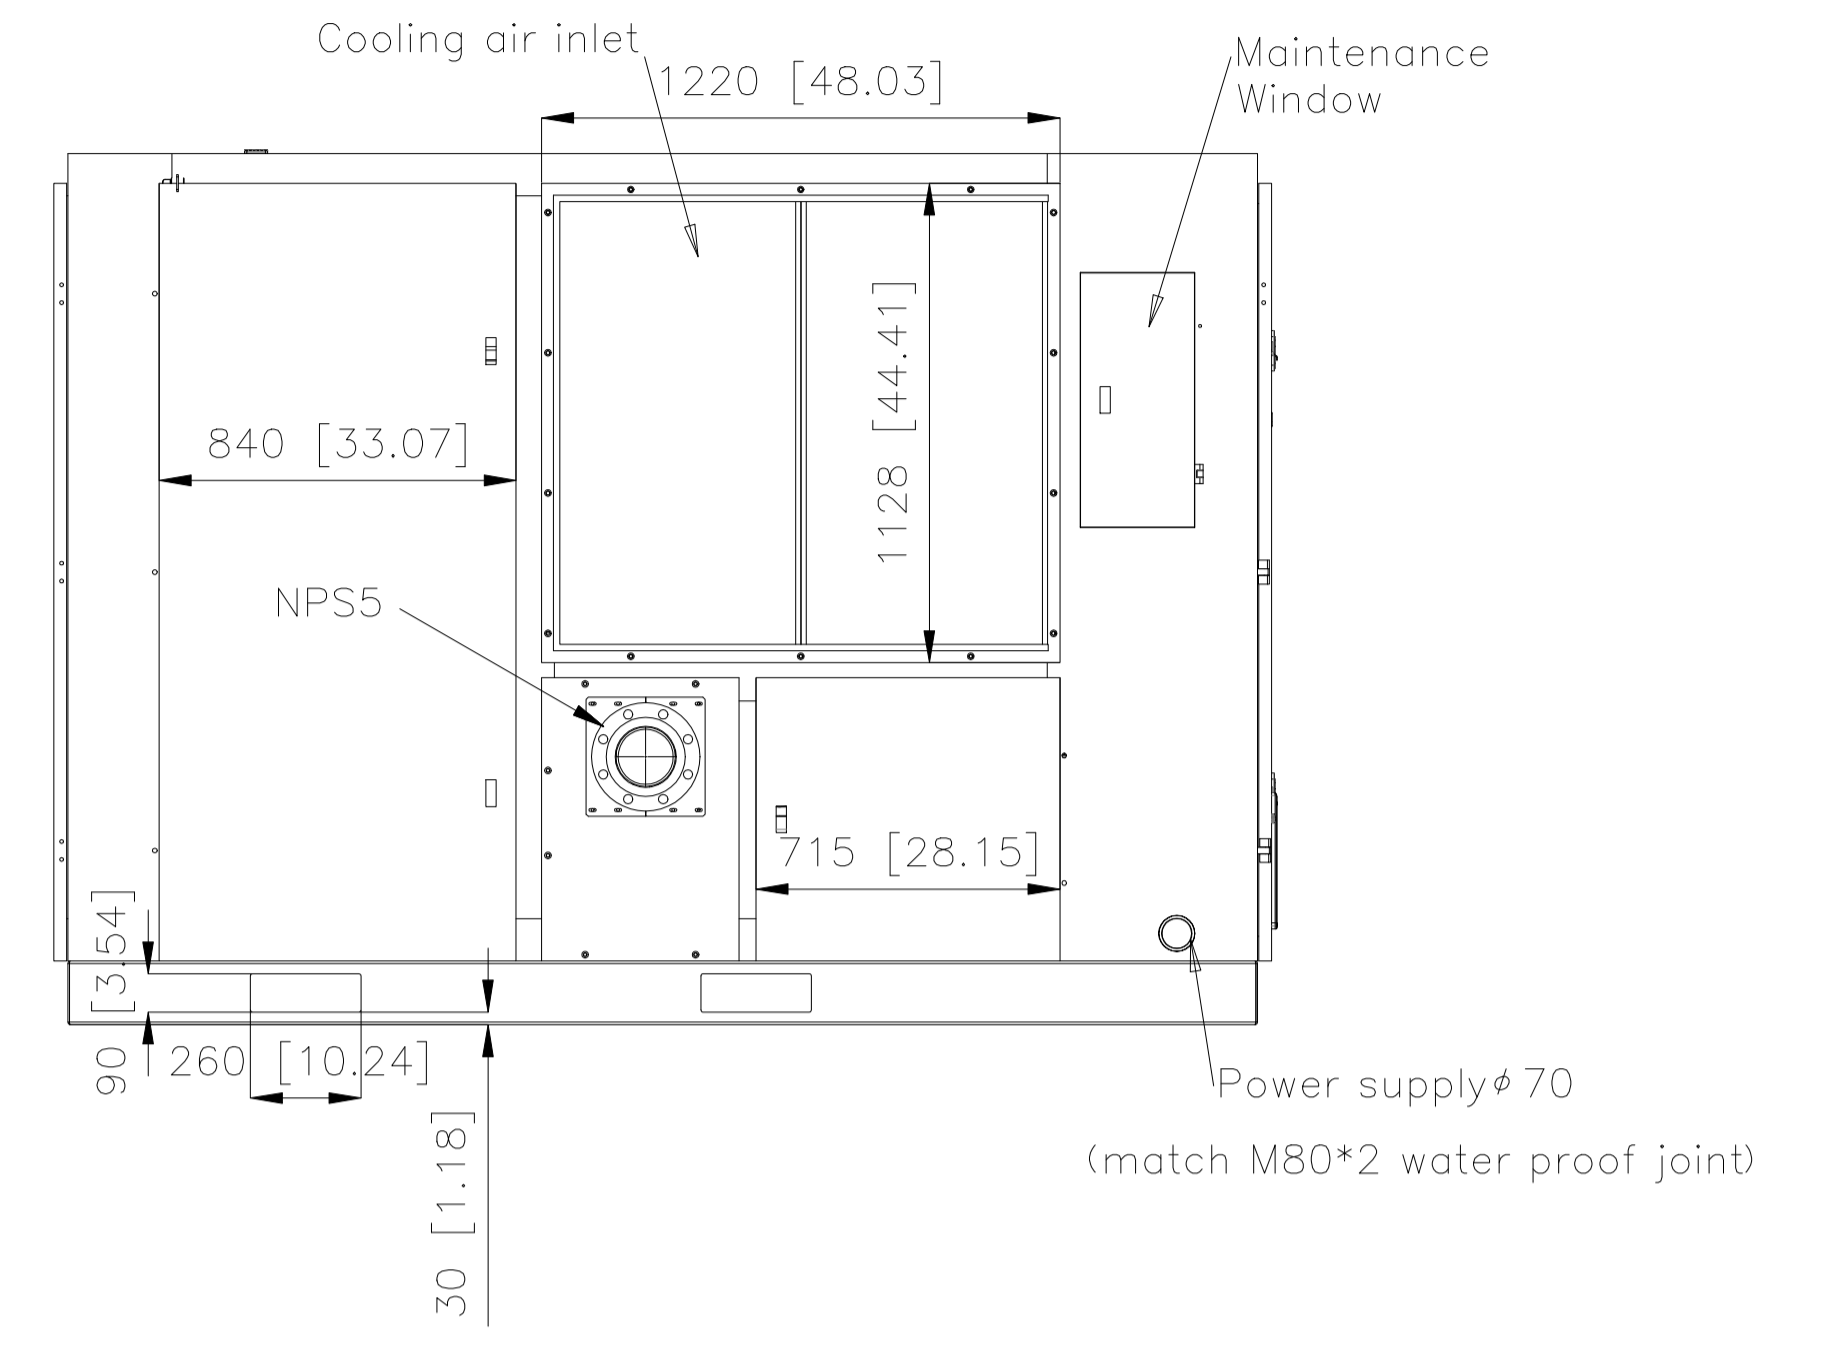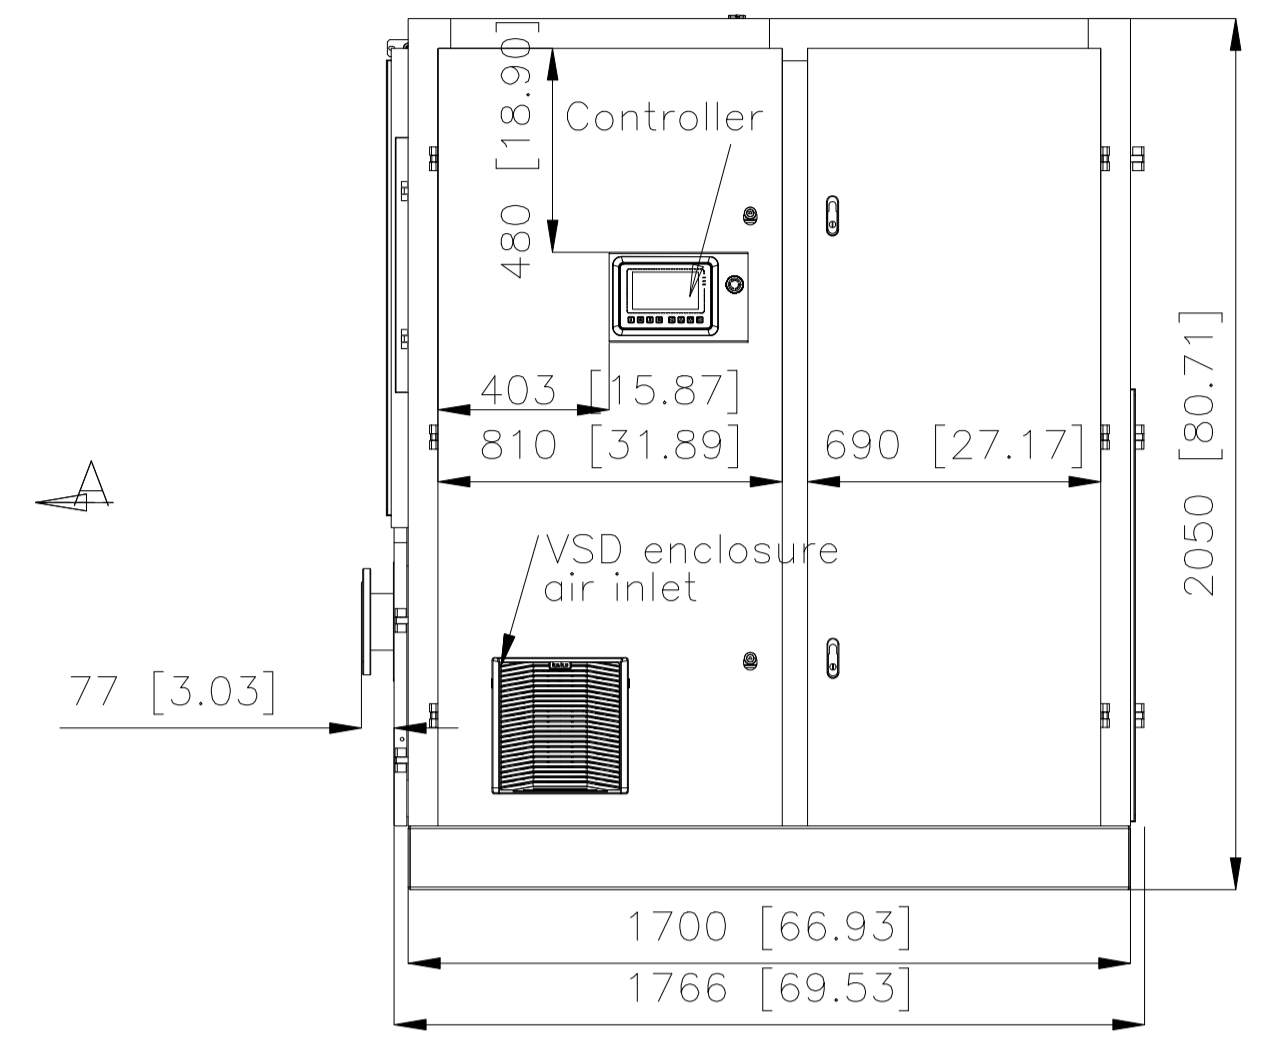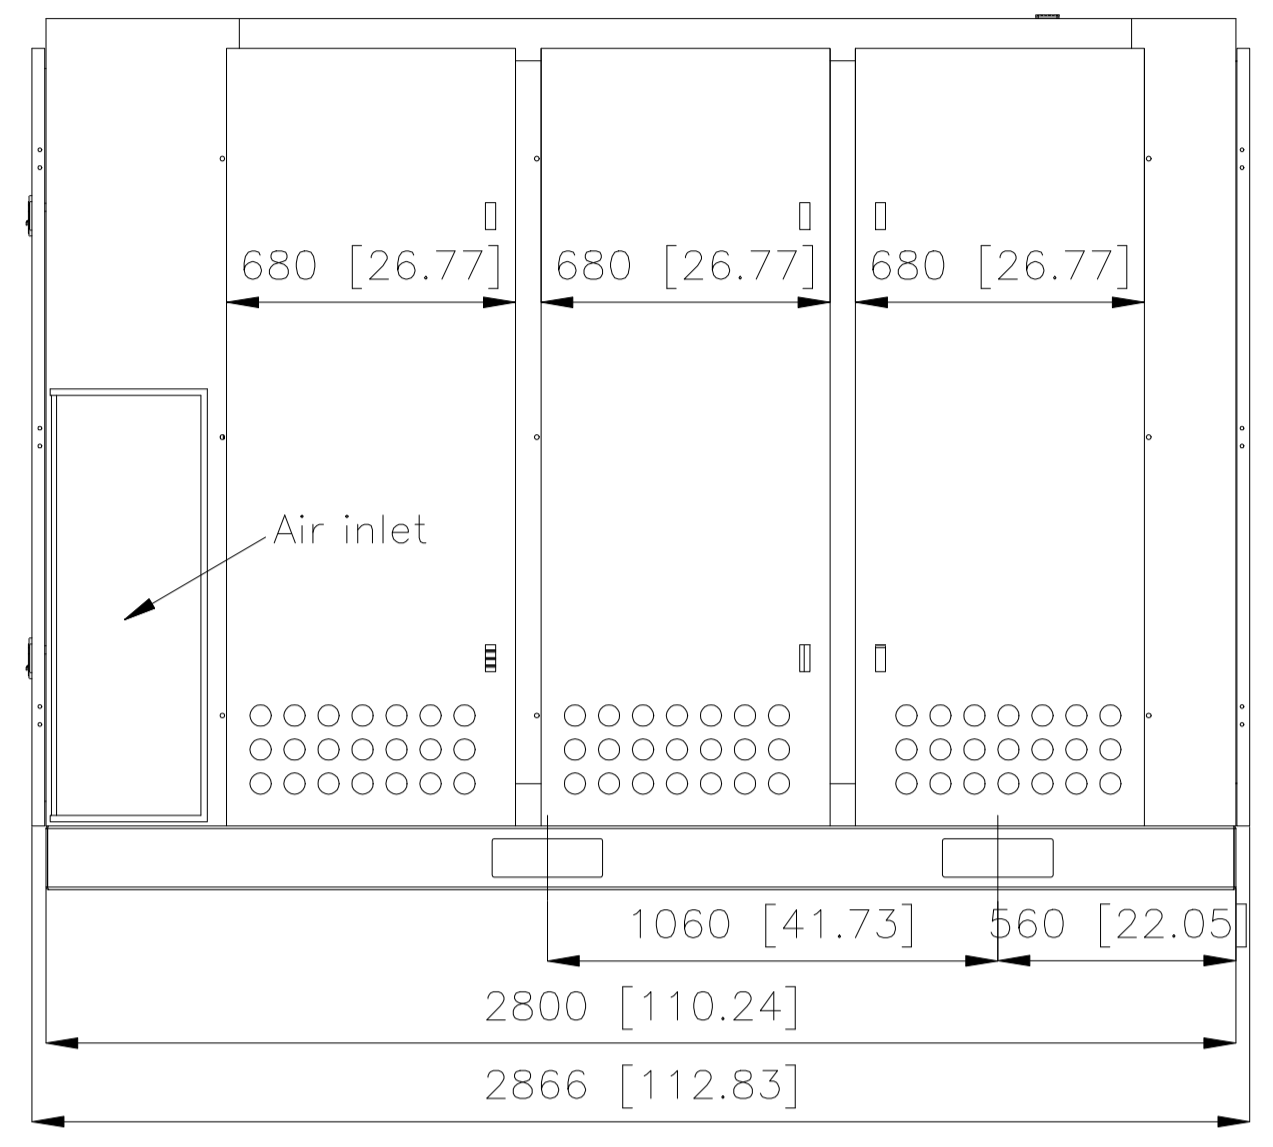

Specification

1. The compressor must have at least 4 feet of clearance around all side for proper ventilation and cooling.
2. The compressor must be installed on a smooth, level surface capable of supporting the gross weight of the machine.

UNLESS OTHERWISE SPECIFIED									
TOLERANCE ON ANGLES: +/- 0.5 DEGREE							KRSL-100-45		
MACHINED PARTS TOLERANCE: +/- 0.03 in									
SHEETMETAL TOLERANCE: +/- .13 in							Outline Dimensions		
FINISH ON MACHINED SURFACES $\nabla_{12.5}$									
DESIGN		STD		PHASE SIGN	WEIGHT	SCALE	L100-45-11252022-002		
				S		1:10			
CHECK		AUDITING					REF. ONLY		
		APPROVE							
				SHEET	1	OF	1	NEXT ASSE	

1 2 3 4 5 6 7 8