



View A

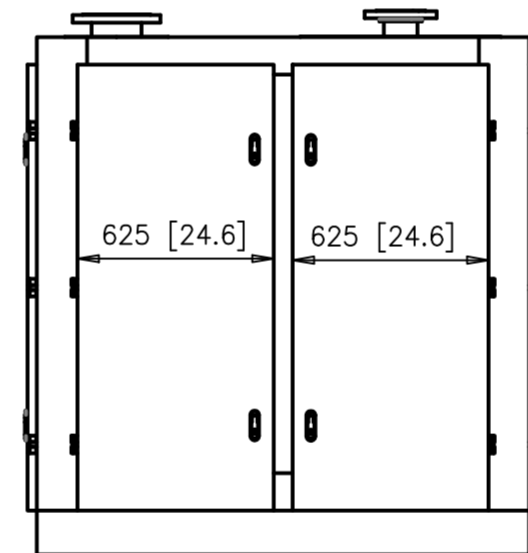

Specification

1. The compressor must have at least 4 feet of clearance around all side for proper ventilation and cooling.
2. The compressor must be installed on a smooth, level surface capable of supporting the gross weight of the machine.

UNLESS OTHERWISE SPECIFIED										
TOLERANCE ON ANGLES: +/- 0.5 DEGREE MACHINED PARTS TOLERANCE: +/- 0.03 in SHEETMETAL TOLERANCE: +/- .13 in FINISH ON MACHINED SURFACES $\nabla 12.5$									KRSV-50	
DESIGN			STD				PHASE SIGN	WEIGHT	SCALE	V50-07182022-002
							S		1:10	REF. ONLY
CHECK			AUDITING				SHEET	1	OF	1
			APPROVE							NEXT ASSE

Outline Dimensions