



Gasoline Driven

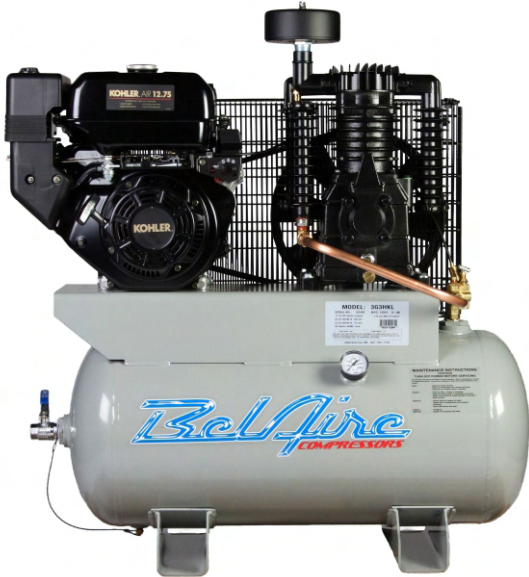

3G3HKL

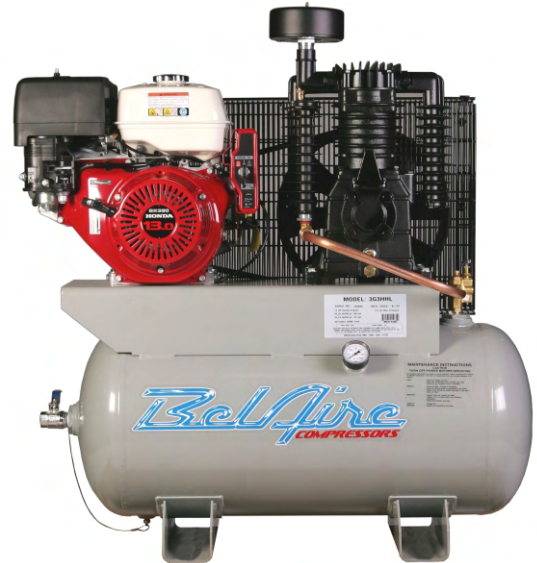

3G3HHL

Model	Part #	HP	Engine	Tank (Gal)	ACFM @ 100 psi	ACFM @ 175 psi	Max Pressure	Dim. In. L X W x H	Shipping Weight
59G3HB	8090250052	9	Intek	30	16.00	14.35	175 psi	45 x 19 x 38	328 lbs
59G3HR	8090250053	10	Robin	30	16.00	14.35	175 psi	45 x 19 x 38	328 lbs
3G3HH	8090250036	11	Honda	30	18.50	16.60	175 psi	45 x 19 x 45	358 lbs
3G3HK	8090250038	14	Kohler	30	18.50	16.60	175 psi	45 x 19 x 45	369 lbs
3G3HHL	8090250037	13	Honda	30	25.25	22.28	175 psi	45 x 19 x 45	378 lbs
3G3HKL	8090250039	14	Kohler	30	25.25	22.28	175 psi	45 x 19 x 45	369 lbs

Standard Features

- Solid Cast Iron Cylinder
- 12 Volt Electric and Recoil Start
- ASME Code Tank and Safety Valves
- Start Key/Panel
- Oil Monitor
- Pull Type Tank Drain
- Engine Slowdown (Pilot Valve)
- Fully Enclosed High Flow Belt Guard

2 Year Warranty

12 Volt Alternator Standard on Honda and Kohler powered models