


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



Product Data - Small Reels Air						
Art.no.	Hose length	Dim. (IDxOD)	Conn. 1	Conn. 2	WP bar (psi)	Weight (kg)
19 911 2020	7	8x12	R 1/4"	R 1/4"	16 (232)	4,7
19 911 2021	7	8x12	1/4" NPT	1/4" NPT	16 (232)	4,7
19 911 2022	10	8x12	R 1/4"	R 1/4"	16 (232)	4,9
19 911 2023	10	8x12	1/4" NPT	1/4" NPT	16 (232)	4,9
19 911 2040	5	11x16	R 1/2"	R 1/2"	12 (232)	4,9
19 911 2041	5	11x16	1/2" NPT	1/2" NPT	12 (232)	4,9
19 911 2080	10	8x12	300-nipple	eSafe 300	16 (232)	4,9
19 911 2081	10	8x12	310-nipple	eSafe 310	16 (232)	4,9
19 911 2082	10	8x12	320-nipple	eSafe 320	16 (232)	4,9
19 911 2083	10	8x12	315-nipple	eSafe 315	16 (232)	4,9

Technical Data:
Feeder hose length: 1,5m
Hose material: Braided PUR (ester based)
Connections: Male thread
Temperature range: -20°C - +60°C (-4°F - +140°F)
Sealing material: NBR

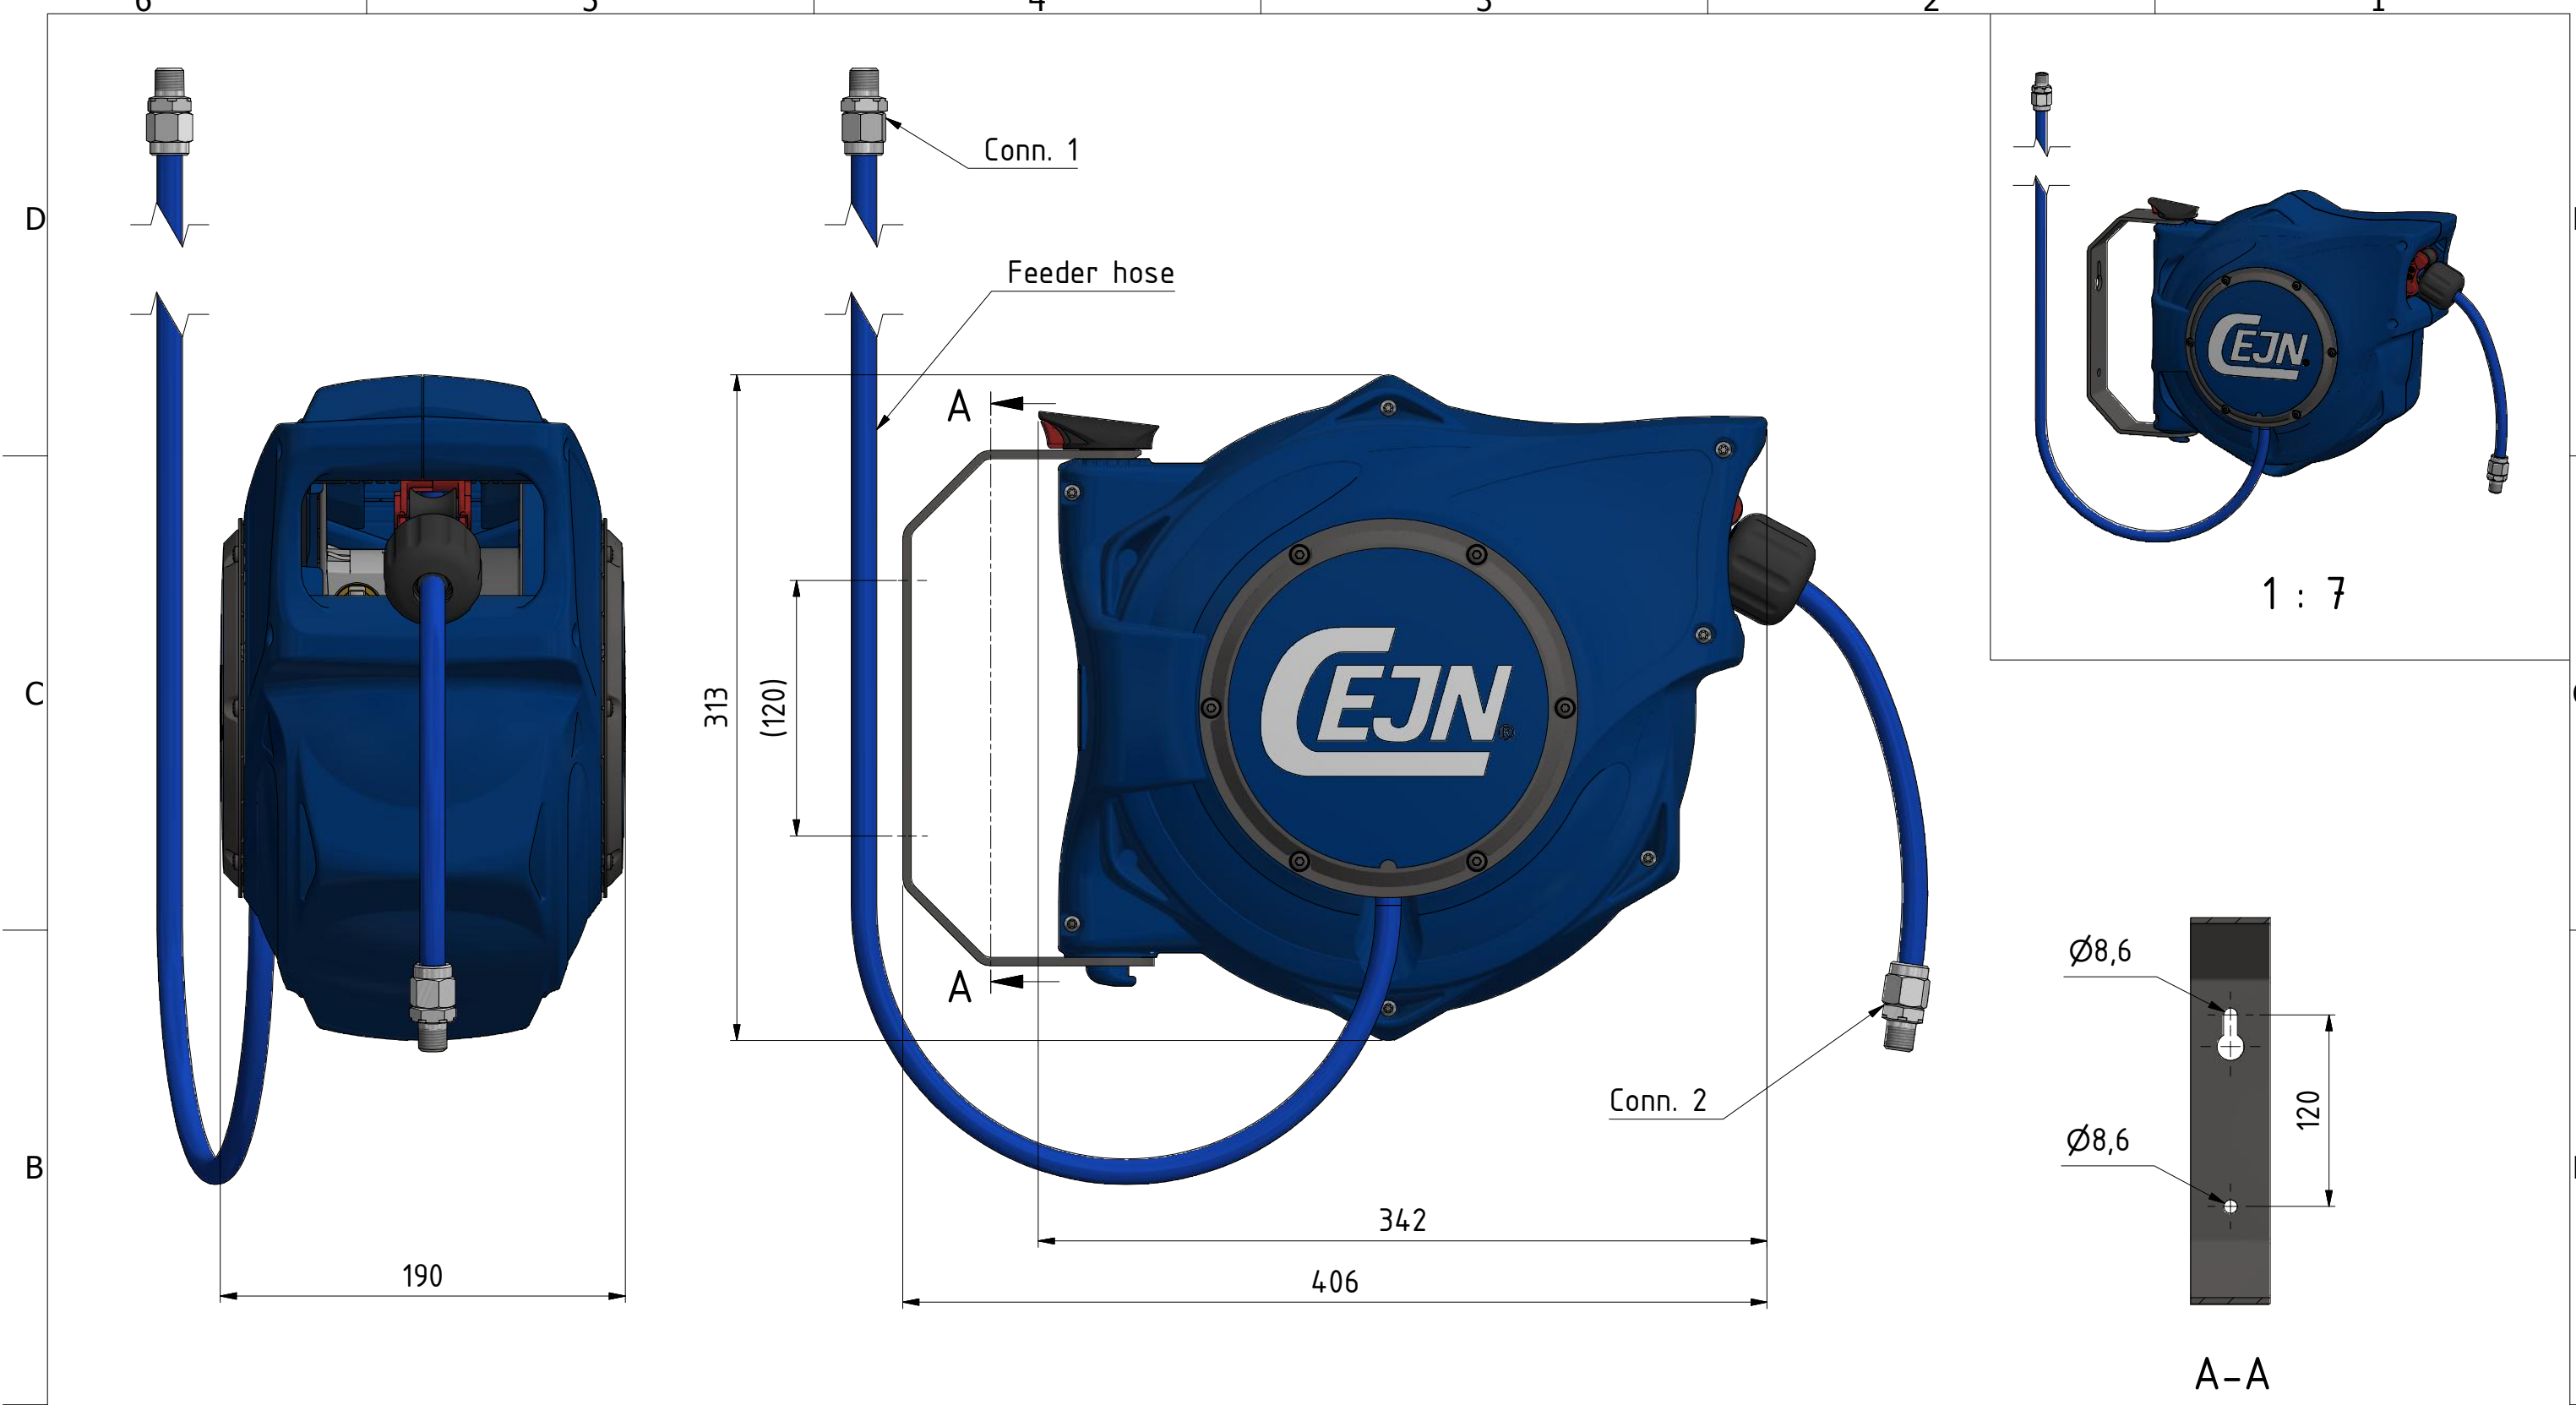

Scale
1 : 3

Drawn
CABJOOL

Checked
CABFA

Appr.
CABOG

ECO
11771

Date
2017-07-11

Small Reels - Air

509119900

Drawing No.

Issue
X1

Sheet
1 /(1)