


# ZT-2200 (EZR<sup>®</sup>)

# PROVEN PERFORMER

- ⚙️ Our most popular integrated unit
- ⚙️ Low-maintenance design with an internal mesh oil filter for longer life
- ⚙️ External cog brake for maximum holding power
- ⚙️ Durable 10cc pump & 10cc motor

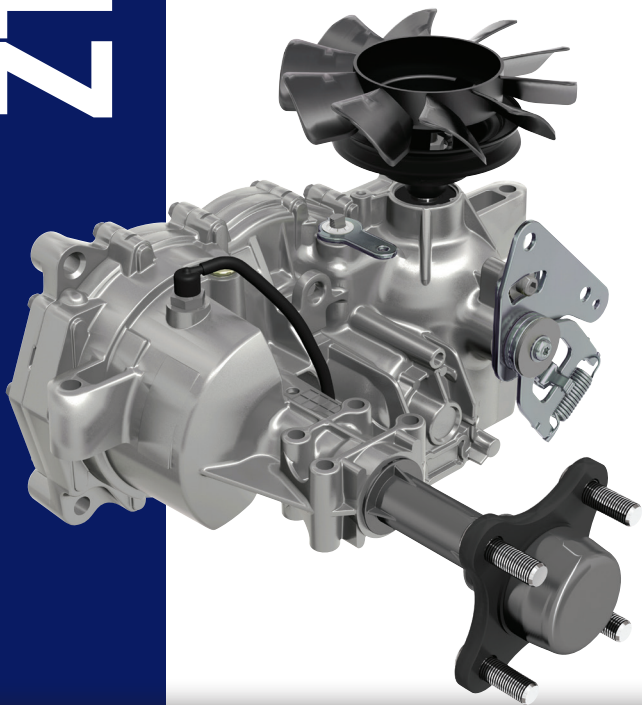

 **HYDRO-GEAR<sup>®</sup>**

**DESIGNED & ASSEMBLED IN THE USA**

# SUPERIOR PERFORMANCE

## SPECIFICATIONS

Pump Displacement	0.61 in <sup>3</sup> /rev [10 cc/rev]
Motor Displacement	0.61 in <sup>3</sup> /rev [10 cc/rev]
Input Speeds	
Max Hi-idle (No Load)	3000 rpm
Min (Loaded)	1800 rpm
Output Torque	up to 215 lb-ft [up to 291 Nm]
Speed	up to 7 mph [up to 11 kph]
Gross Vehicle Weight	up to 900 lbs [up to 408 kg]
Axle Shaft Diameter	1.0 in [25.4 mm]
Axle Shaft Options	Two-Flats 4-bolt Flange
Weight of Unit	29 lbs [13 kg]

*Specifications subject to change without notice*

**FOR MORE INFORMATION VISIT:  
WWW.HYDRO-GEAR.COM**



ZT200-10/2017-V1