


V5180K30 5 HP TWO-STAGE



SPECIFICATIONS


HORSEPOWER	5.0 HP
MOTOR RPM	1800
VOLTAGE	208/230
CFM DELIVERED @ 175 PSI	18 CFM
CFM DISPLACED	23.1 CFM
TANK CAPACITY	80 GALLONS (ASME)
FACTORY SETTINGS	145-175 PSI
PUMP-UP / RECOVERY TIME	6:57 / :47
SHIPPING WEIGHT	495 LB
DIMENSIONS (LxWxH)	30"x24"x77"
PHASE	SINGLE
THERMAL PROTECTION	Magnetic Starter
AMP DRAW (RUNNING)	25.6
DUTY CYCLE %	100%

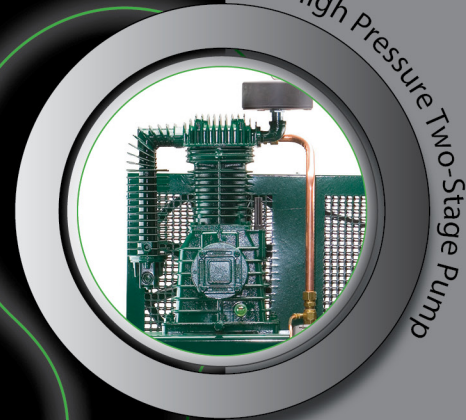

High Pressure Two-Stage Pump



Heavy-Duty Shut-Off Valve

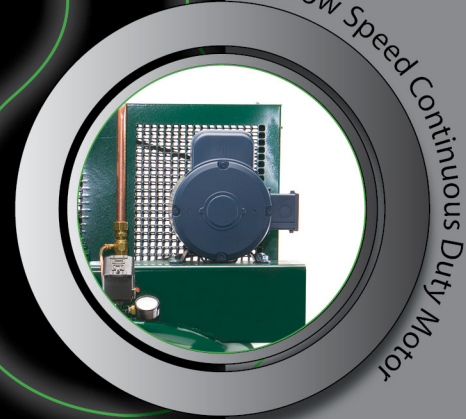

Low Speed Continuous Duty Motor