



AB5PLUS .5 HP DIRECT DRIVE



Quiet, Only 59 dB!

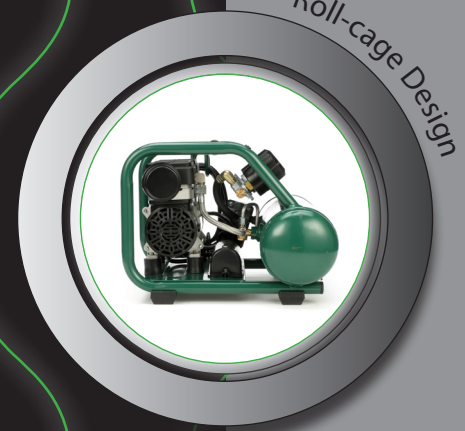

Roll-cage Design

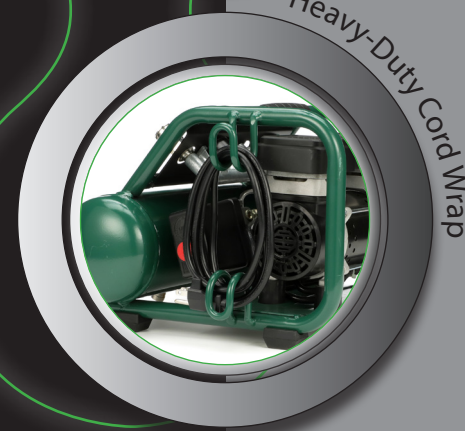

Heavy-Duty Cord Wrap

SPECIFICATIONS

HORSEPOWER	.5 HP
MOTOR RPM	1700
CFM DELIVERED @ 40 PSI	1.6 CFM
CFM DELIVERED @ 90 PSI	1.0 CFM
TANK CAPACITY	1 GALLON
FACTORY SETTINGS	95-125 PSI
PUMP-UP / RECOVERY TIME	1:35 / :35
SHIPPING WEIGHT	30 LB
DIMENSIONS (LxWxH)	16.25"x14.25"x11.15"
NOISE LEVEL	59 dBA
THERMAL PROTECTION	MANUAL
AMP DRAW (RUNNING)	2.8

EQUIPMENT

FEATURES

- 2.8 AMP MOTOR
- SAFETY RELIEF VALVE
- START/STOP PRESSURE SWITCH
- 1/4" UNIVERSAL COUPLER
- REGULATOR
- PRESSURE-RELIEF VALVE

AB5PLUS

.5 HP TRANSMISIÓN DIRECTA



¡Silencios! Solamente 59 dB.



Armazón rígido protector



Envoltura para cable resistente

ESPECIFICACIONES

CABALLOS DE FUERZA	.5 HP
R.P.M. DEL MOTOR	1700
SALIDA DE PIES ³ A 40 PSI	1.6 CFM
SALIDA DE PIES ³ A 90 PSI	1.0 CFM
CAPACIDAD DEL TANQUE	3.8 LITERS
VALORES DE FÁBRICA	95-125 PSI
TIEMPO DE BOMBEO A PRESIÓN OPERATIVA/TIEMPO DE RECUPERACIÓN	1:35 / :35
PESO DE ENVÍO	13.6 Kg
DIMENSIONES (LARGO x ANCHO x ALTURA)	41.3 cm x 36.2 cm x 28.3 cm
NIVEL DE RUIDO	59 dBA
PROTECCIÓN TÉRMICA	MANUAL
INTENSIDAD DE CORRIENTE	2,8

EQUIPO

CARACTERÍSTICAS

- MOTOR DE 2,8 AMPERIOS
- VÁLVULA DE LIBERACIÓN DE SEGURIDAD
- INTERRUPTOR DE PRESIÓN PARA ARRANQUE/DETENCIÓN
- ACOPLADOR UNIVERSAL DE 6,35 MM (1/4")
- REGULADOR Y INDICADOR
- VÁLVULA DE ARRANQUE EN FRÍO