

**XAIR**  
**SC80**

# WORLD'S SMALLEST ENGINE DRIVEN 80 CFM SCREW COMPRESSOR

"SMALL INVESTMENT, BIG RETURN"



POWERED by  
**HONDA**



## X AIR SC80

AIR Compressor, weighing only 319 lbs coupled with retractable handle and pneumatic tires, makes it manually transportable by one person. It fits through the smallest of openings, yet is powerful enough for the largest of job sites. Ideal for sandblasting, breakers, rock drills, cut-off saws, painting, chipping hammers, graffiti removal, post drivers, nail guns, staple guns and much more.



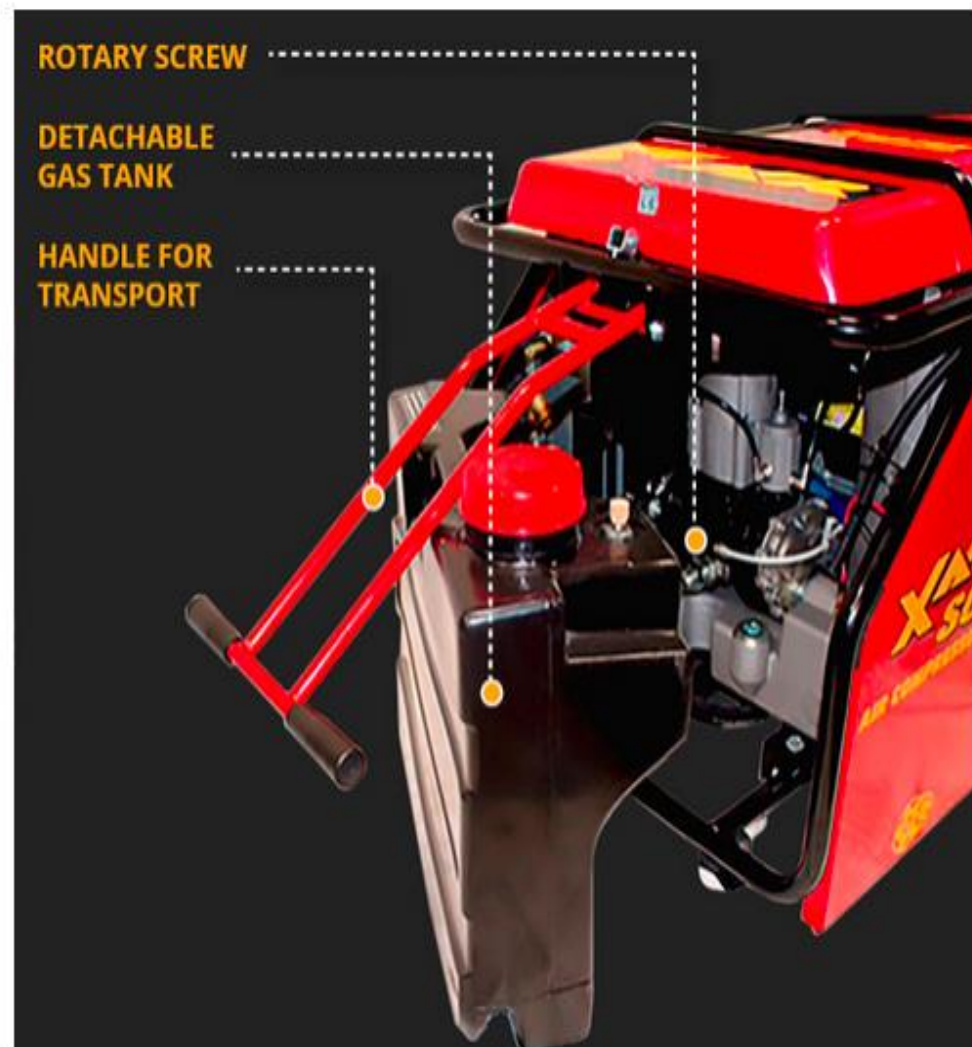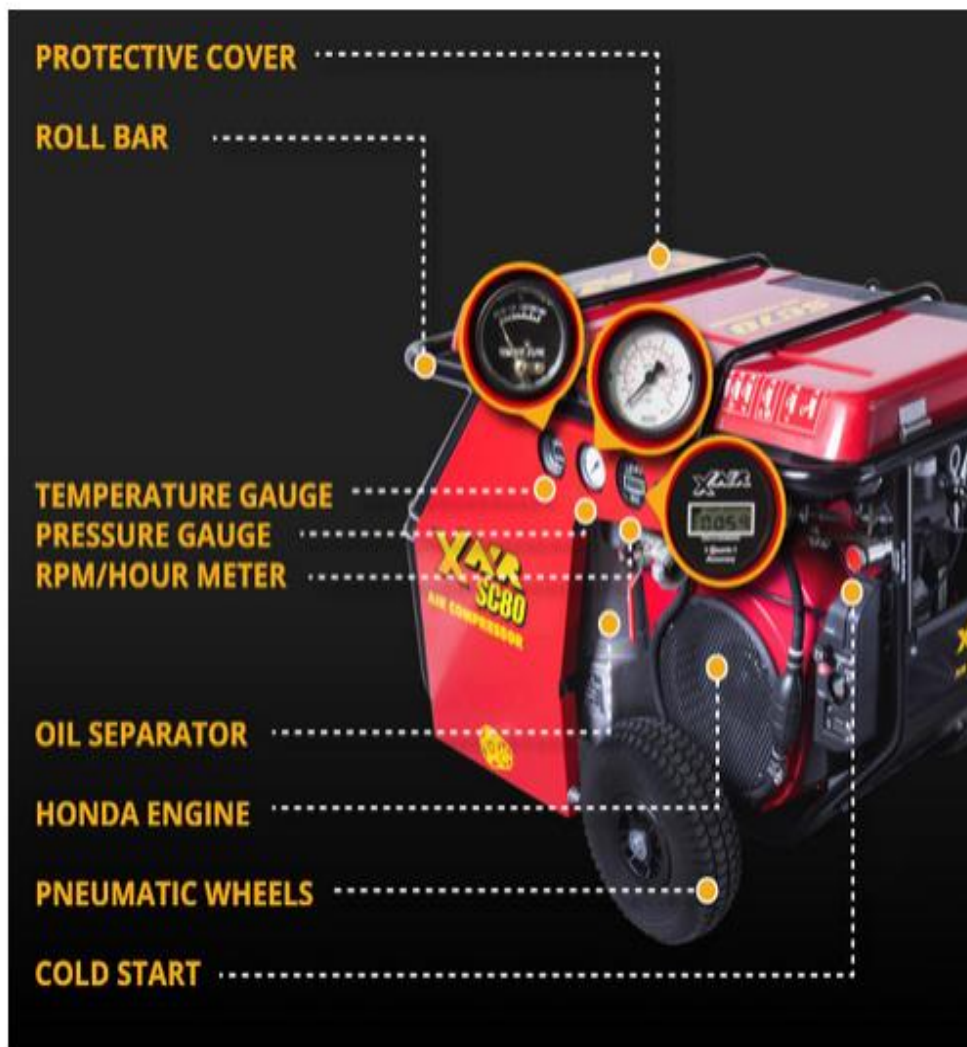



## FEATURES & BENEFITS

- X AIR oil injected rotary screw features a new rotor profile derived from the very latest compressed air technology, resulting in an extremely durable, efficient and high-performance air end.
- Removable gas tank further reduces transport weight, and makes fill up easy.
- MONITAIR continuously variable idle control gives you very fast throttle response for power on demand. Engine idles until power is required, making it very economical.
- Airflow & pressure are constant & continuous, no need for an air tank.
- Automatic shutdown systems protect against low engine oil and high temperature of air end.
- Temperature gauge, pressure gauge & rpm/hour meter.
- Rugged construction; protected by a steel chassis, roll bar and side panels all finished with lasting powder coat paint.
- Honda OHV engine features low noise & vibration, fuel efficient, durable and outstanding reliability.
- Ease of Maintenance: over 20 years of market experience has confirmed extremely simple & low maintenance costs.
- This powerful compressor (SC80) can operate a 90 lbs class breaker & doesn't need to be towed; creating a package that is for power & portability, like no other!

## SPECIFICATIONS SC80

Rated output m3-min. / cfm	2.26 / 80
Rated pressure bar. / psi	6.9 / 100
Pressure range bar / psi*	5 - 8 / 72 - 125
Oil Capacity compressor l / gal	4.0 / 1.1
Compressor	Rotary Screw
Drive	Dual xpz belts
Engine HONDA	GX690
Cooling system	Air/Oil
Full safety shutdown	Compressor & Engine
Engine output kw / hp	17.9 / 24
Starting system	Electric
Engine RPM range	2200 / 3600
Gas tank capacity l / gal	20 / 5.3
Lifting hooks	Included
Dry weight kg/lbs	145 / 319
Dimension L x W x H	86 x 66 x 58 cm 34 x 26 x 23 in
Sound level dB(A) @ 23 feet	74

\*Optional 12 bar / 175 psi model available

### CONTACT US

Toll free : 888-900-CONX (2669)

[info@conxequipment.com](mailto:info@conxequipment.com)