


QP Series

QP Pro 5-15 | QP Max 5-15

QP Series – Tougher Inside and Out

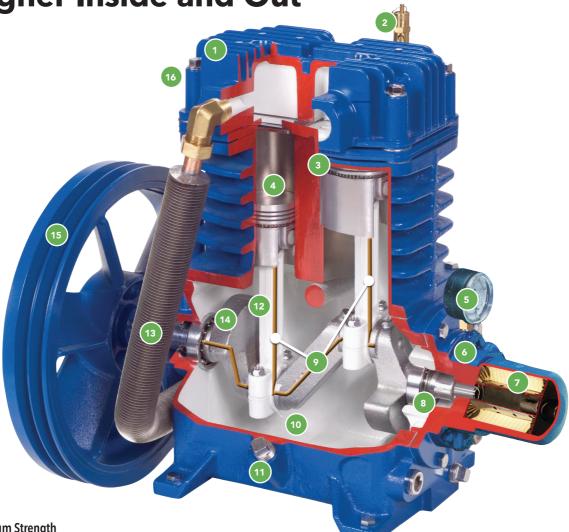

- 1 Optimum Strength
 Aluminum head for strength
 and optimum heat dissipation.
- 2 Pressure Relief ASME-code interstage pressure relief valves.
- Positive Sealing Integrity Graphite cylinder and head gaskets for positive sealing integrity.
- 4 High Efficiency
 Cast-iron cylinders maintain rigid tolerances for high efficiency.
- 5 Maximum Pressure
 Performance
 Oil pressure gauge.

- 6 Minimized Downtime Gerotor positive displacement oil pump.
- Quincy Designed Spin-on oil filter.
- 8 Long Operating Life Industrial-class bearings ensure long operating life.
- High Pressure Lubrication Rifle-drilled crank shaft and connecting rods allow for full pressure lubrication.

- **Full Range Capacity**Extra capacity oil reservoir assures low oil temperature.
- 11 Smooth Operating System
 Cast-iron construction for
 dependability and smooth
 operation.
- **Easy Serviceability**Two-piece connecting rods
 make service easier.
- High Pressure Lubrication
 High-efficiency fin and tube
 intercooler reduces inter-stage
 air temperature for maximum
 performance and increased
 valve life.

- Trouble-Free Operation
 Computer-aided-design,
 balanced counter-weighted
 crankshaft assures smooth,
 trouble-free operation.
- Effective Cooling System
 Electronically balanced
 fan-type cast-iron flywheel
 delivers a powerful flow of air
 across the intercooler, cylinder
 and heads for effective unit
 cooling and smooth operation.
- Maximum Strength
 Valve design provides the highest volumetric efficiency in the marketplace, using stainless-steel valves for maximum strength.



Quincy Has the Compressed Air Solution for Your Application

Since 1920, Quincy's trademark blue compressors have been hard at work building our company's reputation for quality and performance in the world's most demanding applications and harshest environments.

We're Still Making History

Today, you'll find that same leadership in Quincy's nextgeneration compressed air solutions that feature everything from smart controls to green technologies. We know that your company is counting on our reputation, that's why every Quincy product is designed, constructed and proven to deliver exceptional customer value before it is worthy of wearing the Quincy name.

Our Promise to You

As a customer, you can always count on Quincy for a low cost of ownership through stable air pressure, easy maintenance and longer equipment life. And we back it all with one of the strongest warranties in the industry. No shortcuts and no substitutions – that's the quality of Quincy.

Get the Oniverse app for your Ouincy Compressor and compressed air system needs

- View and manage your compressor warranty registrations
- Log maintenance, access parts book and manual on your mobile device
- Find your local parts and service provider

Built in the USA

Quincy Compressor proudly builds each one of its reliable QP product lines at its factory headquartered in Bay Minette, Alabama. As a American-based air compressor manufacturer, Quincy makes high quality equipment assembled by a 200+ workforce on the Gulf Coast of Alabama. With nearly a century of experience, you can count on Quincy to deliver performance, reliability and top-notch after-the-sale-support through an extensive distribution and direct store network.





Scan to download the Oniverse App







CompleteSatisfaction

QP Pro and Max packages are offered with an industry-leading extended warranty. Quincy's NO BULL program provides three years of protection on the compressor and two years on the package with the purchase of an extended warranty kit. Rely on Quincy's nationwide network of factory-authorized distributors to stock genuine Quincy Compressor replacement parts and accessories to ensure proper maintenance of your compressor by trained service specialists.



Stronger, Longer

Quincy Compressor's name is synonymous with quality thanks to the high manufacturing standards set back in 1920. Located in Bay Minette, Alabama and the first to introduce a fully pressure lubricated reciprocating compressor back in 1939, Quincy features its American-made QP series designed for tougher 175 PSI applications, where traditional splash lubrication just won't measure up.

Dependable & Reliable

When lubrication breaks down or there is metal-to-metal contact due to lack of lubrication, it can cause destructive damage to an air compressor. If your compressor is down, so is your production.

- QP's full pressure, lubricated system allows smooth, continuous operation
- Pressurized oil flowing to all critical surfaces means less wear on the components
- Spin-on filter lengthens the life and improves reliability

Lasting Performance

The QP heavy duty, cast-iron compressor has an oil pump for pressure lubrication to the crankshaft, bearings and connecting rods up to the wrist pins. Coupled with an attractive price, QP balances cost effectiveness with longer life to maximize your investment.

• Up to 15% longer life than a splash-lubricated compressor.

• Heavy duty, cast-iron construction for rugged performance.



OP-7.5 Vertical

Premium Features

QP Compressor Features

- Fully Pressure Lubricated Two-Stage
- Rifle-Drilled Crankshaft, and Connecting Rods
- Gerotor Positive Displacement Oil Pump
- Oil Filter and Pressure Gauge
- Cast-Iron Crankcase, Cylinders and Flywheel
- Stainless Steel Reed Valves with Valve Bumpers
- Ductile Iron, Double Throw Crankshaft
- Industrial Ball Bearings
- Two-Piece Aluminum Connecting Rods
- Fin and Tube Inter-Cooler
- Sight Level Oil Gauge on QP-5, QP-7.5 and QP-10
- Automotive Style Inlet Filter/Silencer
- One-Year Warranty Standard
- *NO BULL Warranty on Pro and Max

QP Unit Features

- Slow Speed Open Drip Proof Motors; 200, 230, 460 or 575 Volt
- 200 PSIG-Rated ASME/CRN-Coded Receiver
- ASME-Coded Relief Valves in the Interstage,
 Discharge Line and Receiver Tank
- Tank Pressure Gauge
- Service Valve
- Pressure Switch on Electric Models
- Loadless Auto-Stop/Start Controls
- 200, 230, 460, 575 Volt Full Voltage Starters[†]
- Single Source Duplex Control Panels on Duplex Units[†]
- Kohler, Honda and Yanmar Engines
- OSHA Compliant Totally Enclosed Belt Guard
- UL and CSA Compliant Electric Components
- Manual Ball Valve Tank Drain[†]
- Factory Fill of Quin-Cip Lubricant
- One-Year Warranty Standard
- *NO BULL Warranty on Pro and Max models

QP Optional Configured Features

- Totally Enclosed Fan Cooled Motors (TEFC)
- NEMA 4
- California Code 462L OSHA Approval
- Air Cooled Aftercoolers*
- Automatic Tank Drain*
- Vibration Isolators on Horizontal Models*
- Simplex Control Panel
- Dual Power Source Duplex Control Panel
- Low Oil Level Switch*
- Dual Controls (Standard on 15 hp Pro and Standard 10-15 hp Max Units)
- Optional Tank Sizes
- Base Mounted Units



*Included on Max models
†Included on Pro models

**Combination Pressure Switch/Starter or Magnetic Starter on QP-5 230-Volt Single-Phase



QP-10 Horizontal







Manufactured in Bay Minette, Alabama Performance You Demand. Reliability You Trust.

^{*} Must purchase associated kit at the same time as the compressor to receive warranty extension.

Quincy QP Model Information

| НР | Phase | Volt | Unit | Tank | Tank | ACFM | | Pressure | QP Pro Part | QP Max Part | Approx | LxWxH |
|-----|-------|------|---------------|------------|---------------|--------------|------|---------------------|---------------|---------------|--------------------|-----------|
| | | | Configuration | | Size (Gal) | @175 PSIG | | Lubricated Model | Number | Number | Ship Wt. (lbs.) | (in) |
| | 1 | 230 | Simplex | Vertical | 80 | 17.2 942 | 042 | QP-5 | 351CS80VCB | 351C80VCBM | 680 | 37x24x74 |
| 5 | | | | Horizontal | 00 | | QP-5 | 351CS80HCA | 351C80HCAM | 660 | 70x23x47 | |
| | | | Duplex | Horizontal | 80 | 17.2 (x2) | 942 | QP-5 | 351CC80DCA | 351C80DCAM | 920 | 69x24x46 |
| 5 | 3 | 230 | Simplex | Vertical | 80 |) 17.2 | 942 | QP-5 | 353DS80VCA23 | 353D80VCA23M | 680 | 37x24x74 |
| | | | | Horizontal | 00 | 17.2 | | QP-5 | 353DS80HCA23 | 353D80HCA23M | 660 | 70x23x47 |
| | | | Duplex | Horizontal | 80 | 17.2 (x2) | 942 | QP-5 | 353DC80DCA23 | 353D80DCA23M | 920 | 69x24x46 |
| | 1 | 230 | Simplex | Vertical | 80 | 22.6 | 1026 | QP-7.5 | 371CS80VCA | 371C80VCAM | 720 | 37x24x74 |
| 7.5 | | | | Horizontal | 00 | | | QP-7.5 | 371CS80HCA | 371C80HCAM | 740 | 70x23x47 |
| | | | Duplex | Horizontal | 120 | 22.6 (x2) | 1026 | QP-7.5 | 371CC12DCA | 371C12DCAM | 1078 | 78x28x55 |
| 7.5 | 3 | 230 | Simplex | Vertical | 80 | 22.6 | 1026 | QP-7.5 | 373DS80VCA23 | 373D80VCA23M | 720 | 37x24x74 |
| | | | | Horizontal | 00 | | | QP-7.5 | 373DS80HCA23 | 373D80HCA23M | 740 | 70x23x47 |
| | | | Duplex | Horizontal | 120 | 22.6 (x2) | 1026 | QP-7.5 | 373DC12DCA23 | 373D12DCA23M | 1078 | 78x28x55 |
| | 3 | 230 | Simplex | Vertical | 100 | 35 | 968 | QP-10 | 3103DS12VCA23 | 3103D12VCA23M | 1000 | 40x30x75 |
| 10 | | | | Horizontal | 120 | | | QP-10 | 3103DS12HCA23 | 3103D12HCA23M | 850 | 78x28x55 |
| | | | Duplex | Horizontal | 200 | 35 (x2) | 968 | QP-10 | 3103DC20DCA23 | 3103D20DCA23M | 1660 | 106x30x64 |
| 1.5 | 3 | 230 | Simplex | Horizontal | 120 | 51 | 923 | QP-15 | 3153DS12HCA23 | 3153D12HCB23M | 995 | 78x28x55 |
| 15 | | | Duplex | Horizontal | 200 | 51 (x2) | 923 | QP-15 | 3153DC20DCA23 | 3153D20DCA23M | 1900 | 106x30x64 |

QP is available in four fully pressure-lubricated, two-stage models from 5 hp to 15 hp. The 230-volt single-phase and three phase Pro and Max part numbers are listed on the chart above. All Pro and Max part numbers are voltage specific. Consult with your Quincy Compressor distributor or direct store for more information.



QP Pro Package 5-15 hp

- ODP Slow Speed Motor
- Motor Overload Protection
- Ball Valve Tank Drain
- Automatic Start/Stop 5 to 10 hp
- Dual Control on 15 hp
- *NO BULL Warranty

QP Max Package 5-15 hp

- ODP Slow Speed Motor
- Motor Overload Protection
- Electronic Tank Drain
- Automatic Start/Stop 5 to 7.5 hp
- Dual Control on 10-15 hp
- Low Oil Pressure Shutdown
- Air Cooled Aftercooler
- Isolator Pads on Horizontals
- *NO BULL Warranty



| Kit P/N | Unit | Coverage |
|------------|----------|-------------------------------|
| 2022163605 | QP-5/7.5 | 2 Year Package 3 Year Pump |
| 2022163606 | QP-10 | 2 Year Package 3 Year Pump |
| 2022163607 | QP-15 | 2 Year Package 3 Year Pump |
| 2022163608 | QP-5 | Year 4 - 5 Pump Only |
| 2022163609 | QP-7.5 | Year 4 - 5 Pump Only |
| 2022163610 | QP-10 | Year 4 - 5 Pump Only |
| 2022163611 | QP-15 | Year 4 - 5 Pump Only |

* NO BULL does not apply to configured units.

Engine Driven

The fully pressure-lubricated system of the Quincy QP is a perfect fit for service truck applications. QP engine driven models are available with a gasoline-powered Honda or Kohler engine or a Yanmar diesel engine.



* Must purchase associated kit at the same time as the compressor to receive warranty extension






QP-7.5 with Honda Engine



QP-7.5 with Yanmar Engine

| Fuel Type | НР | Engine Brand | Tank Configuration | Tank Size (Gal) | Pressure Lubricated Model | ACFM @ 175 psig | RPM | Part Number | LxWxH (In) | Approx Ship Wt. (lbs.) |
|--------------|----|-----------------|-----------------------|--------------------|---------------------------------|--------------------|------|-------------|---------------|------------------------------|
| Diesel | 10 | Yanmar | Horizontal | 30 | QP-7.5 | 22.0 | 990 | D307Y30HCD | 42x21x40 | 550 |
| Gas | 13 | Honda | Horizontal | 30 | QP-7.5 | 23.6 | 1060 | G313H30HCE | 42x21x40 | 515 |
| | 14 | Kohler | HOHZOHIAI | | | | | G314K30HCE | | 501 |

Compressed Air Systems Best Practice

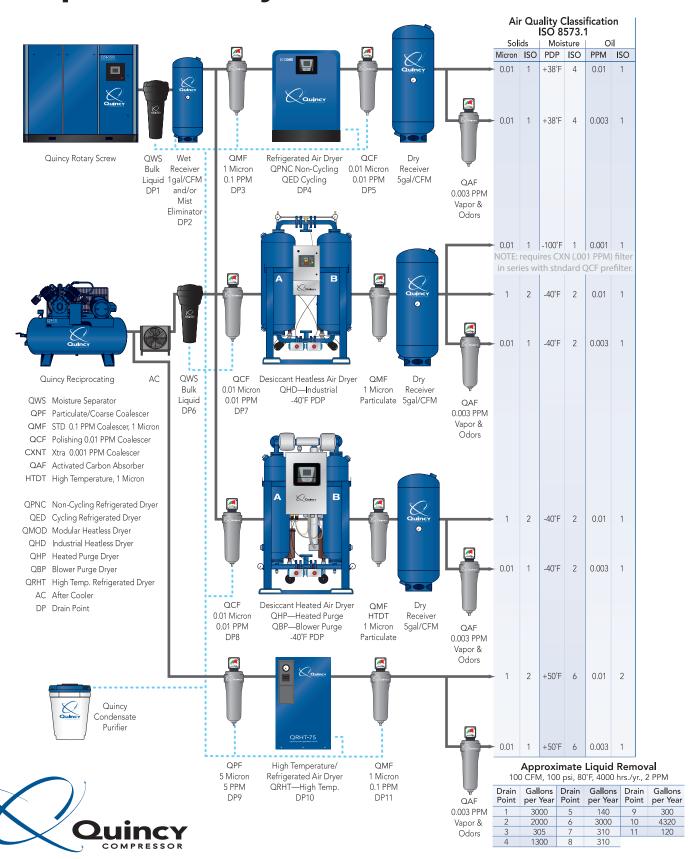

Performance You Demand. Reliability You Trust.™