



# A075D120-3230


Electronic Control Panel  
(2) 7.5 HP  
2 STAGE

54.6 CFM @175psi

76" x 41" x 53"

670 RPM

1250 LBS.

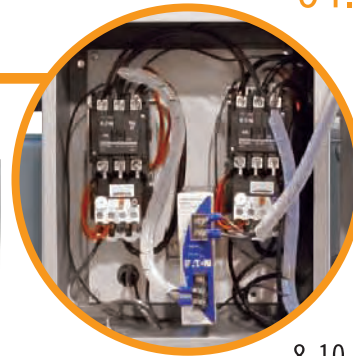

- 4-6 Person Body Shop ■
- 8-10 Person Auto Repair Shop ■
- Truck Repair or Tire Shop ■
- Small Manufacturing Plant ■



Also Available:  
**EXTENDED  
WARRANTY KIT**

(Part# AX-W95)

\*Two Warranty Kits required on duplex units

## 7.5 HP Three Phase 230v/460v Motor

- Heavy Duty Motor
- Pre-wired Magnetic Starter
- Also available in Single Phase 230v

## Large Displacement 3 Cylinder Pumps

- Only 670 RPM
- 27.3 CFM @175 PSI each
- Over 8 1/2' of Finned Intercooling for improved efficiency
- Solid Cast Iron Cylinders and Crankcase
- Rod Inserts and Ball Bearing Mains

## Electronic Control Panel

- Balances run time equally between pumps

## 120 Gallon Horizontal Tank


- ASME Certified
- Also available on 240 gallon horizontal tank

## Commercial/Industrial Use

This Duplex unit features an electronic control panel that balances run time equally between each pump. It is perfect for applications where a 10HP compressor is too small and has the added benefit of a built in back-up compressor for those who can't afford to be without air.

# Fully Packaged, Fully Set!

Make sure your C-Aire compressor is set up correctly from the start! C-Aire's Fully Packaged Compressors include a factory installed Belt Guard Mounted Aftercooler and Moisture Minder Auto Tank Drain. This is the most affordable way to significantly reduce moisture and prolong the life and effectiveness of your pneumatic tools by removing approximately 60% of the moisture in your compressed air. Fully Packaged units also include an Installation Kit.

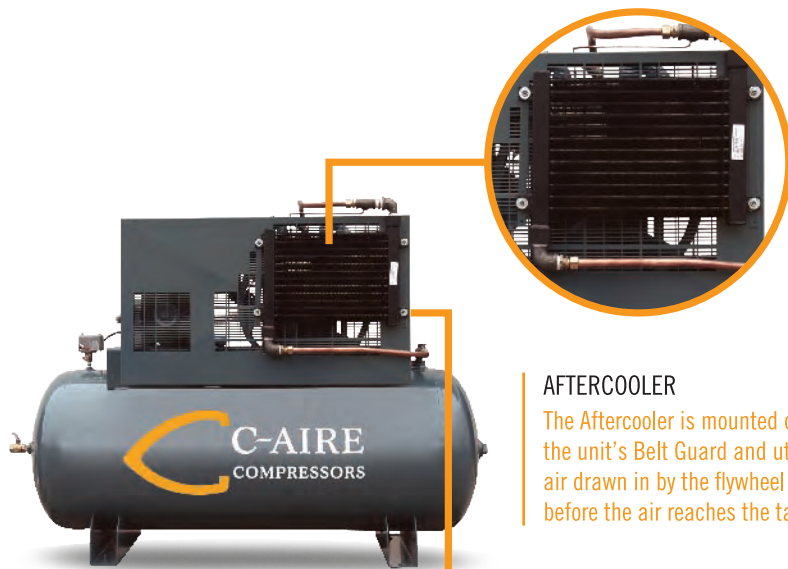


### AFTERCoolER

The Aftercooler is mounted directly to the unit's Belt Guard and utilizes the air drawn in by the flywheel for cooling before the air reaches the tank.



### AUTOMATIC TANK DRAIN

The Automatic Tank Drain operates each time the compressor cycles, stores condensation without wasting air, prevents valves from fouling and reduces corrosion.

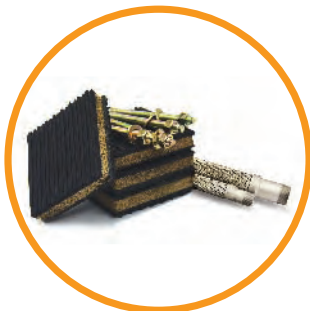

### INSTALLATION KIT

- 4 Mounting Pads
- 4 Anchor Bolts
- Steel Braided Flex Hose

Quality built... *because quality lasts.*

## NEXT SIZE **UP**



### A100D240-3230

- 10 HP
- 2 STAGE
- 76.4 CFM
- 839 RPM
- 240 GALLON TANK
- MAGNETIC STARTER

- 6-11 Person Body Shop
- 10-15 Person Auto Repair Shop
- Manufacturing Plant

## NEXT SIZE **DOWN**



### A050D120-3230

- (2) 5 HP
- 2 STAGE
- 35.4 CFM
- 970 RPM
- 120 GALLON TANK
- MAGNETIC STARTER

- 3-5 Person Body Shop
- 4-7 Person Auto Repair Shop
- Truck Repair or Tire Shop
- Small Manufacturing Plant